# PRODUCT DATASHEET C17720\_EMERALD-AP1-PC

## **EMERALD-AP1-PC**

Symmetric beam for anti-panic lighting.

## **SPECIFICATION:**

Dimensions Ø 21.6 mm
Height 6.9 mm
Fastening glue, pin
ROHS compliant yes 1



### **MATERIALS:**

ComponentTypeMaterialColourFinishEMERALD-AP1-PCSingle lensPCclear


### **ORDERING INFORMATION:**

Component Qty in box MOQ MPQ Box weight (kg)

C17720\_EMERALD-AP1-PC 3456 288 144 5.4 » Box size: 480 x 280 x 300 mm



# **PRODUCT** C17720\_EMERALD-AP1-PC

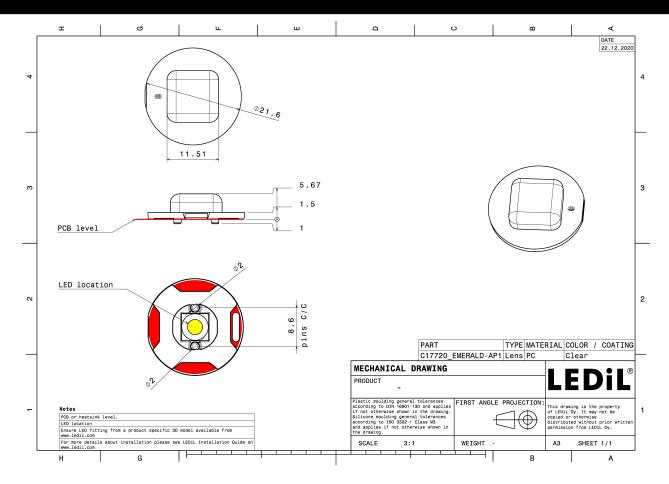

See also our general installation guide: www.ledil.com/installation\_guide

# PRODUCT DATASHEET C17720\_EMERALD-AP1-PC


## **OPTICAL RESULTS (SIMULATED):**

# CREE &

LED J Series 5050 Round LES

FWHM / FWTM 120.0° / 138.0°
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White


Required components:



# CREE \$

LED XP-G3
FWHM / FWTM 130.0° / 141.0°
Efficiency 89 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:



# CREE &

LED XP-L2

FWHM / FWTM 130.0° / 142.0°

White

Efficiency 89 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour
Required components:


# CREE \$

LED XT-E

FWHM / FWTM 122.0° / 132.0° Efficiency 90 %

Peak intensity 0.5 cd/lm LEDs/each optic 1
Light colour White

Required components:





## **OPTICAL RESULTS (SIMULATED):**

# CREE &

LED XT-E


FWHM / FWTM Asymmetric

Efficiency 90 %

Peak intensity 0.5 cd/lm LEDs/each optic 1

Light colour White

Required components:



## **MUMILEDS**


LED LUXEON 5050 Square LES

FWHM / FWTM 120.0° / 141.0 + 138.0°

Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White

Required components:




## **MUMILEDS**

LED LUXEON HL2X FWHM / FWTM 134.0° / 143.0°

Efficiency 91 %
Peak intensity 0.4 cd/lm

LEDs/each optic 1
Light colour White

Required components:




#### **OSRAM**

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White


Required components:



Published: 18/01/2021



## **OPTICAL RESULTS (SIMULATED):**

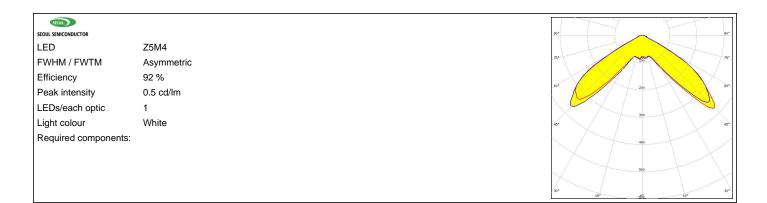



# PRODUCT DATASHEET C17720\_EMERALD-AP1-PC

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

## **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### **LEDIL Inc.**

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy