

JENNY

Silicone lenses designed for sports field, area and canopy lighting and compatible with up to 7070 size LED packages, CSP clusters and up to 11 mm LES size COBs.

LEDiL was the first in the world to launch a mass-produced LED silicone optic by introducing the JENNY-family. Designed for street and area lighting such as high masts to meet the strictest standards in lighting sport fields, airports and harbours. The latest JENNYS come with no spilling light backwards or upwards, and are optimized for the latest ultra-high-power LEDs typically producing over 90 % efficiency. High thermal capabilities of silicone ensure your products will last for years. All JENNY optics can be ordered as single lenses or in 8X1 arrays with an optional frame for screw installation.


JENNY-8X1

280 x 35 mm 8X1 lens arrays



PRODUCTS:


F15910_JENNY-8X1-FT65

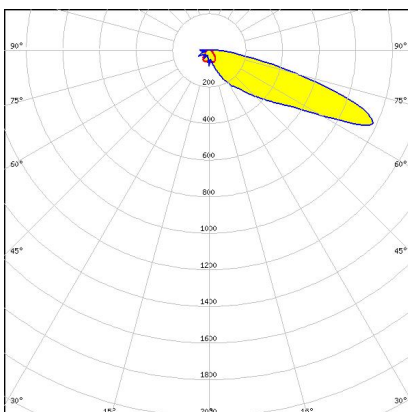

Dimensions: 280.0 mm x 35.0 mm
Height: 15.35 mm

Forward throwing beam with peak in 65°.
8X1 variant.


F15574_JENNY-8X1-FT45

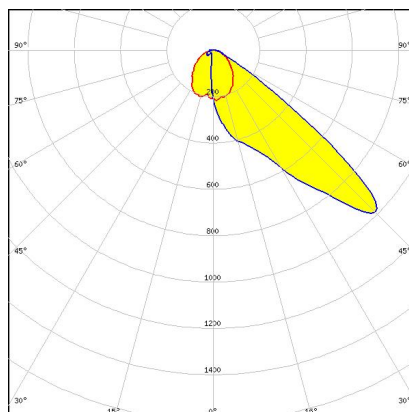

Dimensions: 280.0 mm x 35.0 mm
Height: 20.65 mm

Forward throwing beam with peak in 45°.
8X1 variant.

F15555_JENNY-8X1-60

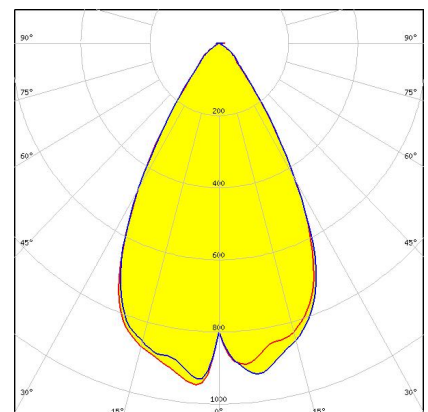


Dimensions: 280.0 mm x 35.0 mm
Height: 13.42 mm

~60° beam. 8X1 variant.


PRODUCTS:

F15554_JENNY-8X1-40

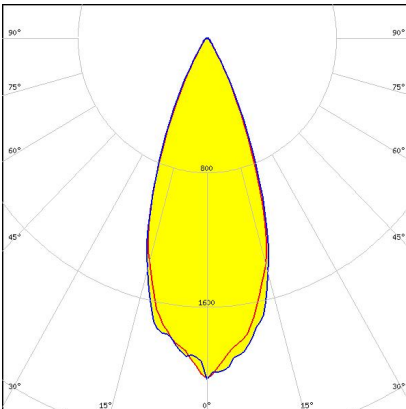


Dimensions: 280.0 mm x 35.0 mm
Height: 15.00 mm
 ~40° beam. 8X1 variant.

F15553_JENNY-8X1-20

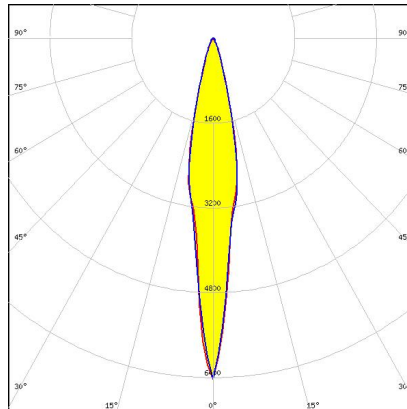


Dimensions: 280.0 mm x 35.0 mm
Height: 14.51 mm
 ~20° beam. 8X1 variant.

F15386_JENNY-8X1-CY-G2

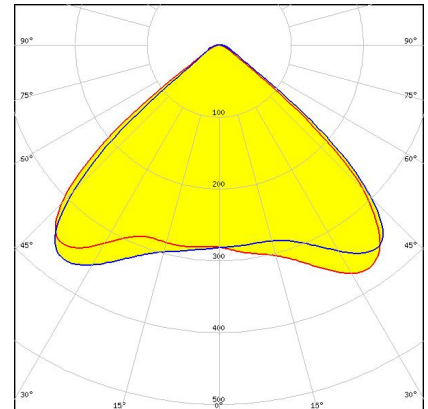


Dimensions: 280.0 mm x 35.0 mm
Height: 11.50 mm
 ~105° + 105° batwing light distribution for
 canopy and symmetrical tunnel lighting.
 Variant with 8 lenses.

F15384_JENNY-8X1-T4-G2

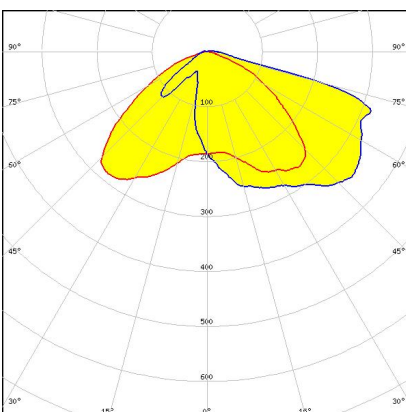


Dimensions: 280.1 mm x 35.1 mm
Height: 17.00 mm
 IESNA Type IV light distribution for wider
 roads and large outdoor areas

F14326_JENNY-8X1-T4

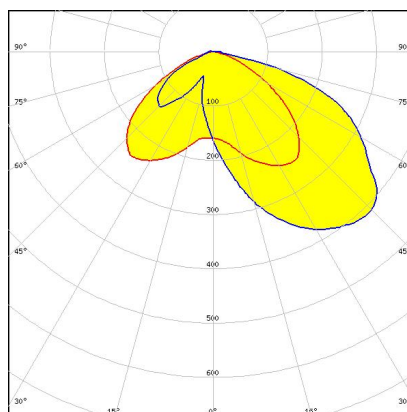

Dimensions: 35.0 mm x 280.0 mm
Height: 17.02 mm
 IESNA Type IV light distribution for wider
 roads and large outdoor areas. Variant
 with 8 lenses and cable channels on the
 sides.

F14325_JENNY-8X1-CY

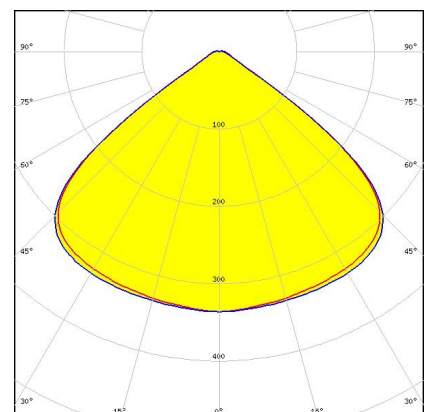

Dimensions: 280.0 mm x 35.0 mm
Height: 11.50 mm
 ~105° + 105° batwing light distribution for
 canopy and symmetrical tunnel lighting.
 Variant with 8 lenses and cable channels
 on the sides.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salu, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)