



C11642\_LAURA-SS

L20050\_LAURA-SC2-HLD-BLK

Recommended PAD design

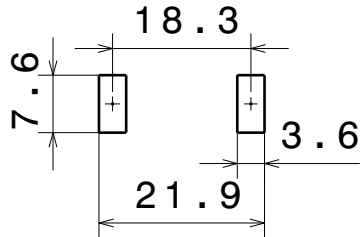


Clip reference distance after soldering

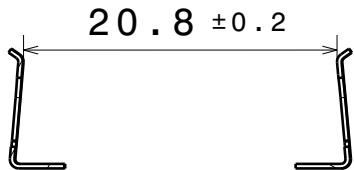

C18696\_SOLDER-CLIP-2

Bottom of solder clip underneath holder

Opening of solder clip facing holder

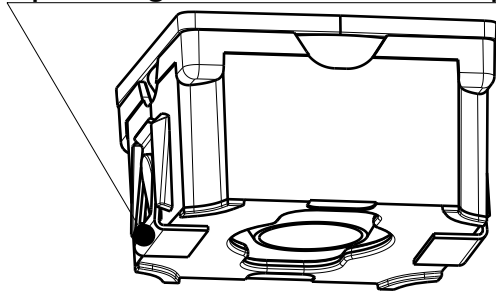

LP20054\_LAURA-SC2-SS-BLK

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C11642_LAURA-SS	LENS	1	PMMA	CLEAR
2	L20050_LAURA-SC2-HLD-BLK	HOLDER	1	PC	BLACK


MECHANICAL DRAWING

PRODUCT

LAURA-SC2-SS

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



LEDiL

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1

WEIGHT -

A3 SHEET 1/1

Notes

PCB or heatsink level.
LED location
Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>