



C11358_LAURA-D

L20051_LAURA-SC2-HLD-WHT


Recommended PAD design

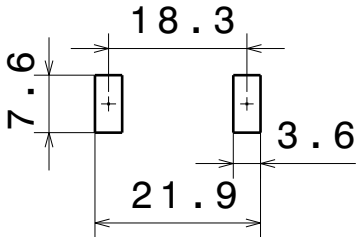

Clip reference distance after soldering

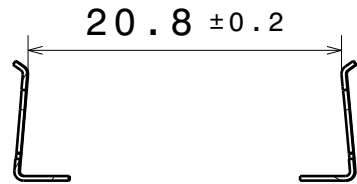

C18696_SOLDER-CLIP-2
Bottom of solder clip underneath holder
Opening of solder clip facing holder

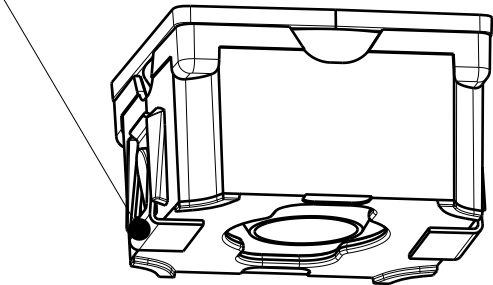

LP20063_LAURA-SC2-D-WHT

COMPONENTS


| INDEX | PART | TYPE | COUNT | MATERIAL | COLOR / COATING |
|-------|--------------------------|--------|-------|----------|-----------------|
| 1 | C11358_LAURA-D | LENS | 1 | PMMA | CLEAR |
| 2 | L20051_LAURA-SC2-HLD-WHT | HOLDER | 1 | PC | WHITE |

MECHANICAL DRAWING

PRODUCT
LAURA-SC2-D

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



LEDiL

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1

WEIGHT -

A3 SHEET 1/1

Notes

| |
|---|
| PCB or heatsink level. |
| LED location |
| Ensure LED fitting from a product specific 3D model available from www.ledil.com |
| For more details about installation please see LEDiL Installation Guide on www.ledil.com |