

4

3

2

1


4

3




2

1


C11410_LXP2-RS

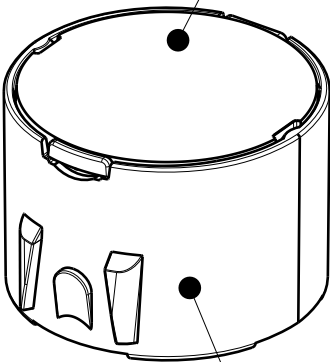


L20032_LEILA-SC2-HLD-BLK

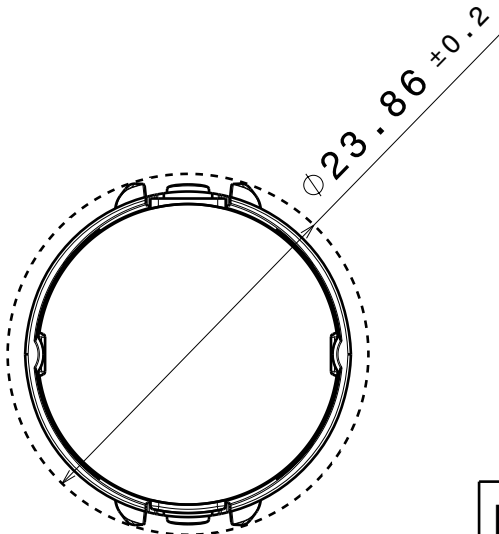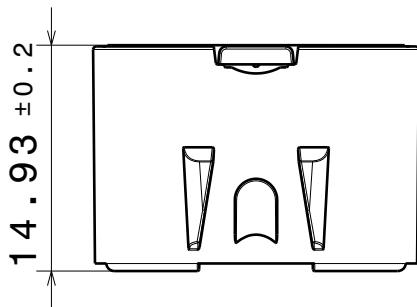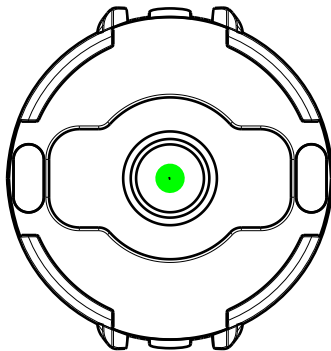


Recommended PAD design

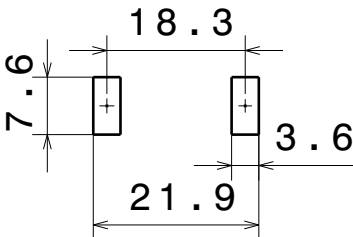

Clip reference distance after soldering

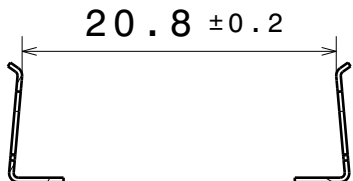

C18696_SOLDER-CLIP-2
Bottom of solder clip underneath holder
Opening of solder clip facing holder

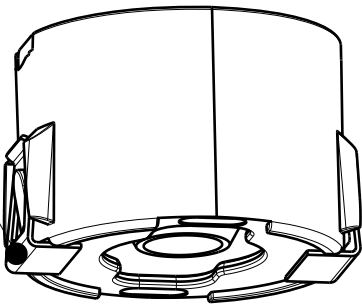

LP20034_LEILA-SC2-RS

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C11410_LXP2-RS	LENS	1	PMMA	CLEAR
2	L20032_LEILA-SC2-HLD-BLK	HOLDER	1	PC	BLACK


MECHANICAL DRAWING

PRODUCT

LEILA-SC2-RS

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1

WEIGHT -

A3 SHEET 1/1

Notes

●	PCB or heatsink level.
●	LED location
	Ensure LED fitting from a product specific 3D model available from www.ledil.com
	For more details about installation please see LEDiL Installation Guide on www.ledil.com