



4

4


C18758\_LXP2-OW-90

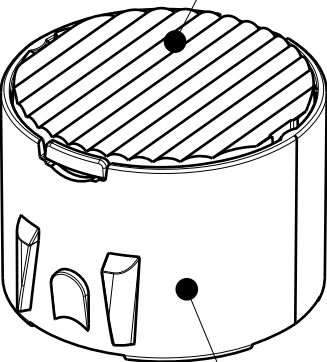


L20033\_LEILA-SC2-HLD-WHT

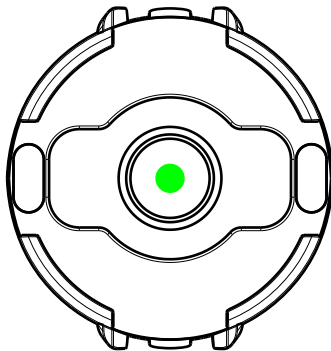

Recommended PAD design


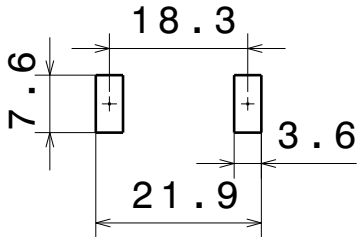


Clip reference distance after soldering




3

3

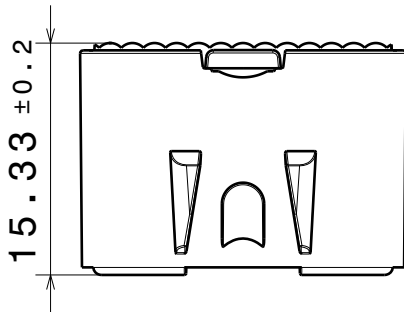


C18696\_SOLDER-CLIP-2  
Bottom of solder clip underneath holder  
Opening of solder clip facing holder

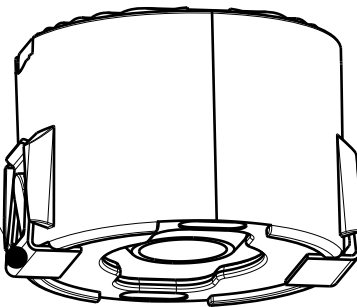

2

2

OW-90 Beam direction

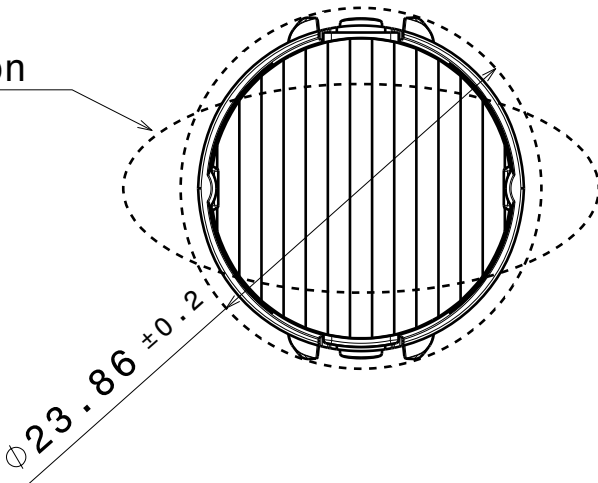

LP20049\_LEILA-SC2-OW-90-WHT

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C18758_LXP2-OW-90	LENS	1	PMMA	CLEAR
2	L20033_LEILA-SC2-HLD-WHT	HOLDER	1	PC	WHITE

MECHANICAL DRAWING


PRODUCT

LEILA-SC2-OW-90

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.  
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1

WEIGHT -

A3 SHEET 1/1

1

1

Notes

●	PCB or heatsink level.
●	LED location
	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
	For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>