

LINNEA-UP

Asymmetric beam for uplighting optimized for 1.0 mm metal sheet or profile. Variant made from PC.

SPECIFICATION:

Dimensions 285.0 x 40.0 mm

Height 10.3 mm

Fastening clips

ROHS compliant yes 1



MATERIALS:

ComponentTypeMaterialColourFinishLINNEA-UPLinear lensPCclear

ORDERING INFORMATION:


ComponentQty in boxModeF16048 LINNEA-UP1623

» Box size: 398 x 298 x 265 mm

Qty in box MOQ MPQ Box weight (kg)162 36 9 8.2



PRODUCT DATASHEET F16048_LINNEA-UP

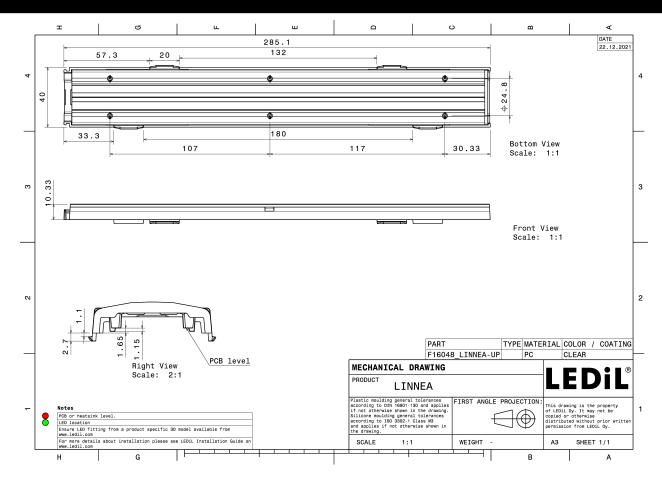

See also our general installation guide: www.ledil.com/installation_guide

2/12





LED XP-E

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric


Efficiency 76 %

Peak intensity 0.3 cd/lm

Light colour White

Required components:

LEDs/each optic




Helvar

LED L-iC-282-827-865-011A

FWHM / FWTM Asymmetric Efficiency 74 % Peak intensity 0.3 cd/lm

LEDs/each optic 1 White Light colour Required components:




Helvar

LED LP-282-840-009A 60/300

FWHM / FWTM Asymmetric Efficiency 75 % Peak intensity 0.3 cd/lm

LEDs/each optic Light colour White Required components:




Helvar

LED LS-282-840-011A FWHM / FWTM Asymmetric

74 % Efficiency Peak intensity 0.3 cd/lm


LEDs/each optic White Light colour Required components:





Helvar

LED LX-282-840-023A $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 75 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour White



※LUMITRONIX®


Required components:

LED LinearZ 280-112 Circadian TW

FWHM / FWTM Asymmetric Efficiency 77 % Peak intensity 0.2 cd/lm LEDs/each optic 1

Tunable White Light colour


Required components:



LUMITRONIX®

LED LinearZ 280-26 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 75 % Peak intensity 0.2 cd/lm LEDs/each optic

Light colour White Required components:




※LUMITRONIX®

LED LinearZ 280-40 TW


FWHM / FWTM Asymmetric Efficiency 76 % Peak intensity 0.3 cd/lm LEDs/each optic

Tunable White Light colour

Required components:






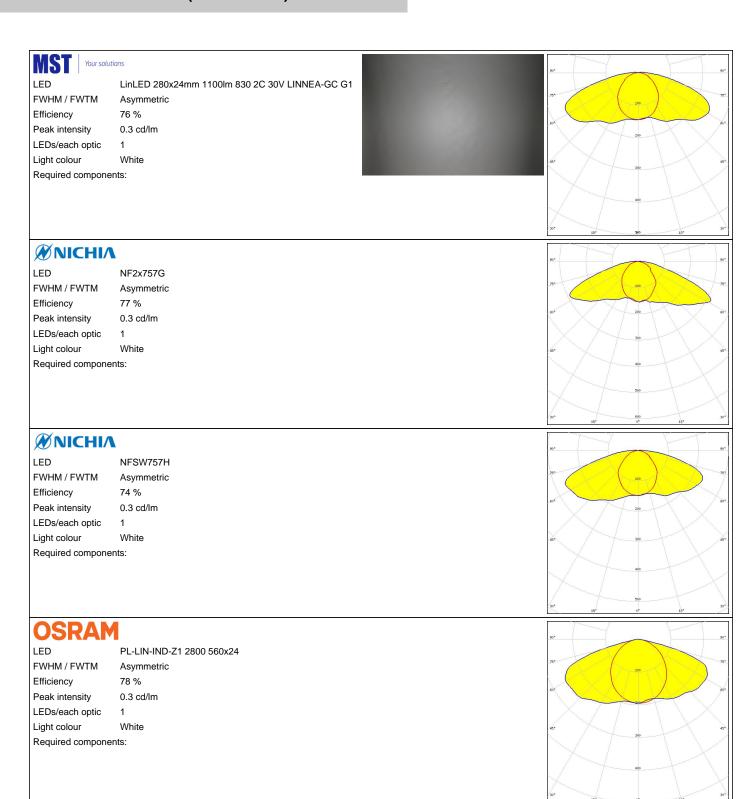



LED PL-LIN-Z5 1100 280x20


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 74 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour White



Required components:

LED PL-LIN-Z5 2000 280x20


FWHM / FWTM Asymmetric Efficiency 74 % Peak intensity 0.3 cd/lm LEDs/each optic 1 White Light colour Required components:



OSRAM Opto Semiconductors

LED


Duris S5 (2 chip) FWHM / FWTM Asymmetric Efficiency 75 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour White Required components:



OSRAM

LED Duris S5 (Single chip)


FWHM / FWTM Asymmetric 76 % Efficiency Peak intensity 0.3 cd/lm LEDs/each optic White Light colour Required components:






Fortimo LED Strip 1ft 1100lm FC HV4 & LV4

FWHM / FWTM Asymmetric Efficiency 73 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour White Required components:




LED Fortimo LED Strip 1ft 1100lm FC HV5 & LV5

FWHM / FWTM Asymmetric Efficiency 77 % Peak intensity 0.3 cd/lm LEDs/each optic 1 White Light colour Required components:



LED Fortimo LED Strip 1ft 650lm FC HV4 & LV4


FWHM / FWTM Asymmetric Efficiency 73 % Peak intensity 0.2 cd/lm LEDs/each optic Light colour White Required components:




PHILIPS

Fortimo LED Strip 1ft 650lm FC HV5 & LV5

FWHM / FWTM Asymmetric 77 % Efficiency Peak intensity 0.3 cd/lm LEDs/each optic White Light colour Required components:





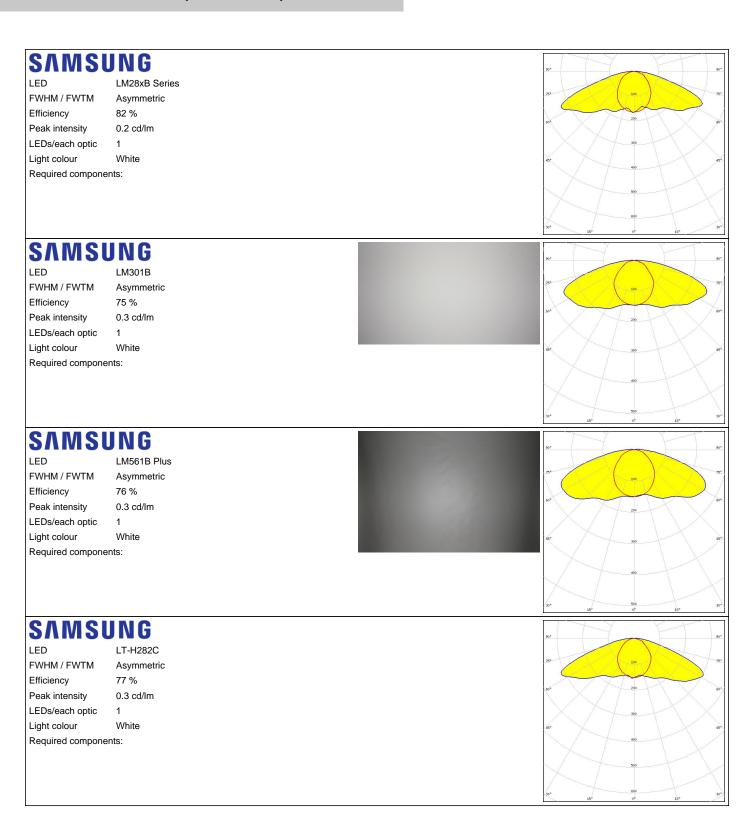




SAMSUNG

LED LT-Q282B
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.3 cd/lm


LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED LT-S282H
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.3 cd/lm

LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED LT-V282E FWHM / FWTM Asymmetric

Efficiency 77 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White


Required components:



LED SEOUL DC 3030

FWHM / FWTM Asymmetric
Efficiency 76 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:






TRIDONIC

LLE G4 24x280mm 1250lm


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 75 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour White Required components:



TRIDONIC

LED LLE G4 24x280mm 2000lm ADV


FWHM / FWTM Asymmetric Efficiency 75 % Peak intensity 0.3 cd/lm LEDs/each optic 1 White Light colour Required components:



TRIDONIC

LED LLE G4 24x280mm 650lm

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 75 % Peak intensity 0.3 cd/lm LEDs/each optic Light colour White Required components:






OPTICAL RESULTS (SIMULATED):



LED LUXEON 3030 2D (Round LES)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric 75 % Efficiency 0.3 cd/lm Peak intensity LEDs/each optic Light colour White

Required components:




SEOUL SEOUL SEMICONDUCTOR

Light colour

LED SEOUL DC 3030C FWHM / FWTM Asymmetric Efficiency 79 % 0.3 cd/lm Peak intensity LEDs/each optic 1 White

Required components:





PRODUCT DATASHEET F16048 LINNEA-UP

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B **Casic Motor Building** Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy