




C16673_OLGA-0

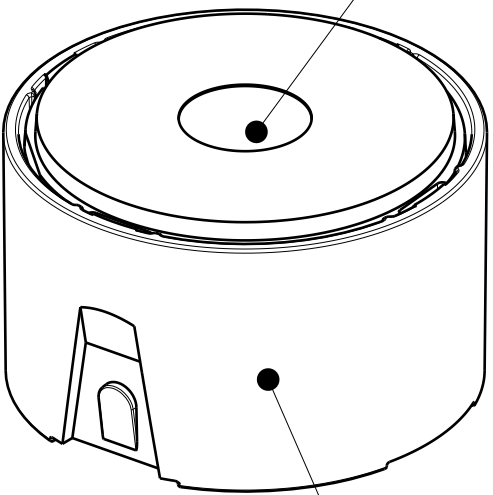


L20246_OLGA-SC2-HLD

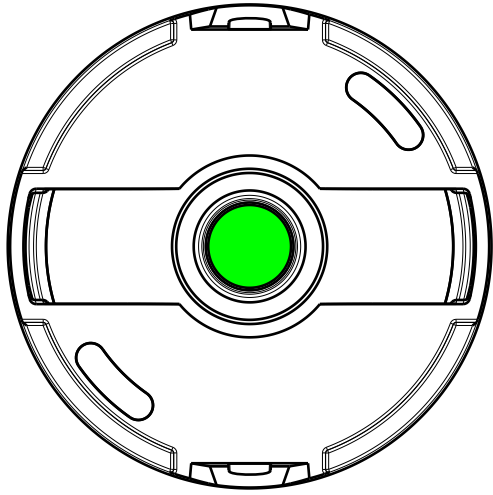


Recommended PAD design

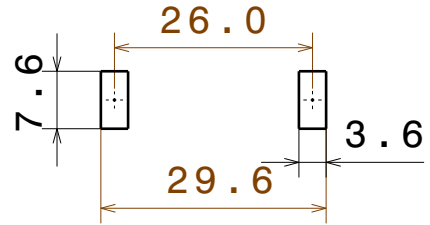

Clip reference distance after soldering

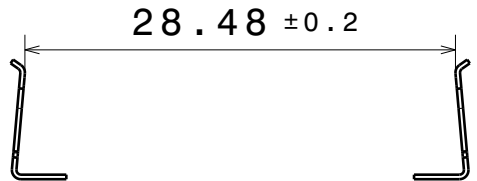

C18696_SOLDER-CLIP-2
Bottom of solder clip underneath holder
Opening of solder clip facing holder

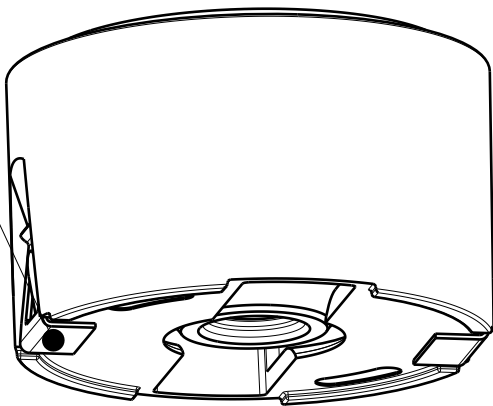

LP20255_OLGA-SC2-0

COMPONENTS

| INDEX | PART | TYPE | COUNT | MATERIAL | COLOR / COATING |
|-------|---------------------|--------|-------|----------|-----------------|
| 1 | C16673_OLGA-0 | LENS | 1 | PMMA | CLEAR |
| 2 | L20246_OLGA-SC2-HLD | HOLDER | 1 | PC | BLACK |

MECHANICAL DRAWING

PRODUCT
OLGA-SC2-0

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

SCALE 2:1

FIRST ANGLE PROJECTION:

WEIGHT -


LEDiL

This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

A3 SHEET 1 / 1

Oval beam direction

Solder-Clips

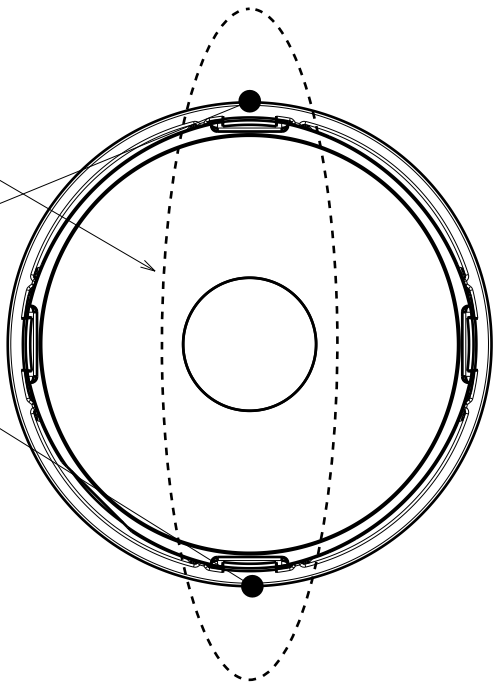

| |
|---|
| Notes |
| PCB or heatsink level. |
| LED location |
| Ensure LED fitting from a product specific 3D model available from www.ledil.com |
| For more details about installation please see LEDiL Installation Guide on www.ledil.com |