

STRADA-T-DW-EP

Soft wide beam with good illuminance uniformity. No position element. Assembly with installation tape.

SPECIFICATION:

Dimensions 19.6 x 15.5 mm

Height 10.7 mm

Fastening tape, screw

ROHS compliant yes 1



MATERIALS:

» Box size:


ComponentTypeMaterialColourFinishSTRADA-T-DW-EPSingle lensPMMAclearVOSU-WU-M-365-TAPETapeAcrylic foam

ORDERING INFORMATION:

ComponentQty in boxMOQMPQBox weight (kg)2FA11993_STRADA-T-DW-EPSingle lens28802405.1

PRODUCT

2FA11993_STRADA-T-DW-EP

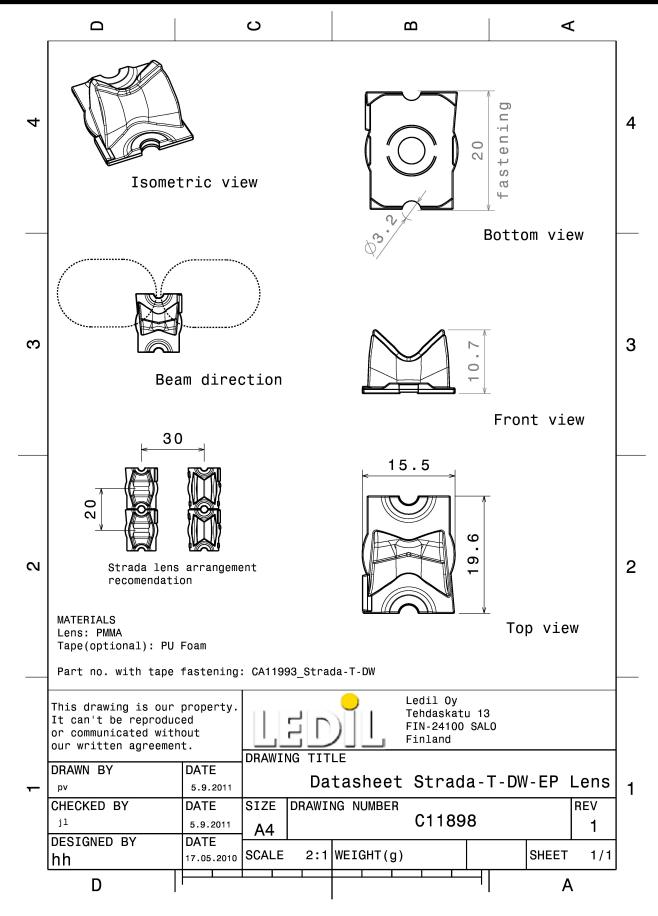


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):

CREE &

LED XP-E
FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White
Required components:



CREE +

LED XP-G
FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White
Required components:

MATERIAL PROPERTY OF THE PROP

LED LUXEON Rebel
FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White
Required components:

DESCRIPTION

LED LUXEON Rebel ES
FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White
Required components:



OPTICAL RESULTS (MEASURED):

WNICHIA

LED NCSxx19A $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 92 % LEDs/each optic Light colour White Required components:

WNICHIA

NVSxx19A FWHM / FWTM Asymmetric Efficiency 92 % LEDs/each optic 1 White Light colour Required components:

OSRAM Opto Semiconductor

LED OSLON SSL 150 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 92 % LEDs/each optic Light colour White Required components:

OSRAM

OSLON SSL 80 LED FWHM / FWTM Asymmetric Efficiency 92 % LEDs/each optic White Light colour Required components:



OPTICAL RESULTS (MEASURED):

SEOUL SEMICONDUCTO

LED Z5

Required components:

FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White

SHARP

LED Double Dome (GM2BB)

FWHM / FWTM Asymmetric
Efficiency 92 %
LEDs/each optic 1
Light colour White
Required components:

PRODUCT DATASHEET 2FA11993_STRADA-T-DW-EP

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy