PRODUCT DATASHEET C12362_STRADA-2X2-DWC

STRADA-2X2-DWC

Universal road lighting beam with excellent mixed illuminance and luminance uniformity. Typically IESNA Type III (medium).

SPECIFICATION:

Dimensions 50.0 x 50.0 mm Height 6 mm Fastening glue, pin, screw yes 🕕 ROHS compliant



MATERIALS:

Finish Material Colour Component **Type** STRADA-2X2-DWC Multi-lens **PMMA** clear

ORDERING INFORMATION:

Component


C12362 STRADA-2X2-DWC

» Box size: 480 x 280 x 300 mm

Qty in box	MOQ	MPQ	Box weight (kg)
800	160	160	5.8




PRODUCT DATASHEET C12362_STRADA-2X2-DWC

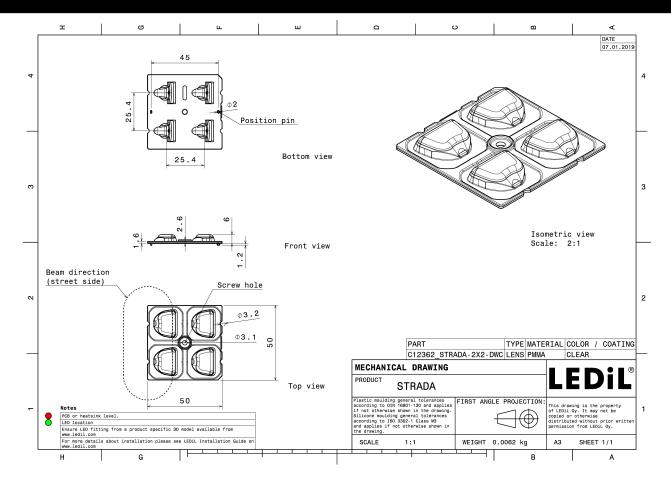

See also our general installation guide: www.ledil.com/installation_guide



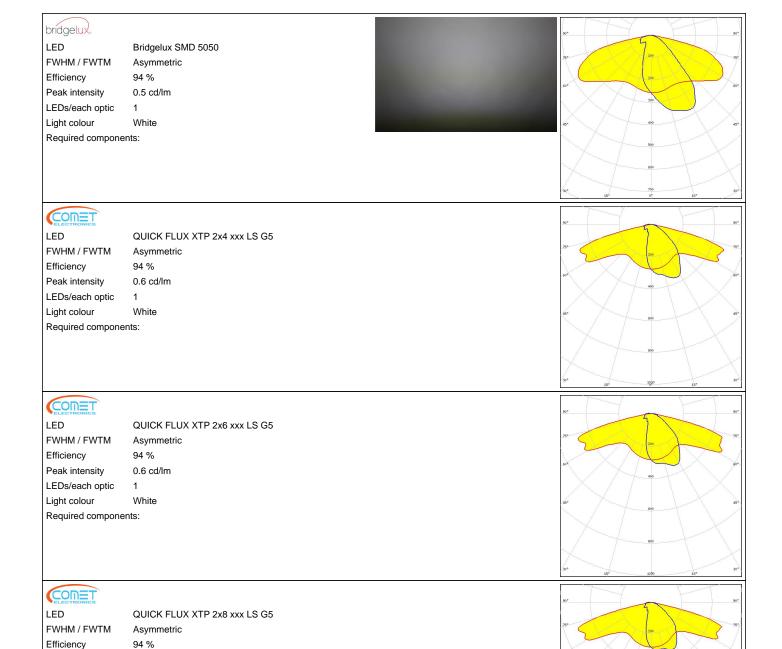

Peak intensity

Light colour

LEDs/each optic

Required components:

0.6 cd/lm

White




CREE &

LED XD16 FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.5 cd/lm

LEDs/each optic 4
Light colour White
Required components:




CREE \$

LED XD16
FWHM / FWTM Asymmetric
Efficiency 93 %

Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White

Required components:




CREE +

LED XHP35 HD FWHM / FWTM Asymmetric

Efficiency 94 %
Peak intensity 0.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:



CREE \$

LED XM-L


FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:



CREE &

LED XM-L3 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 96 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White Required components:

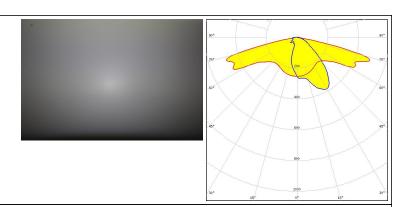


CREE &

LED XP-G FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:

CREE +

LED


XP-G2 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White Required components:



CREE \$

XP-G3 FWHM / FWTM Asymmetric Efficiency 91 % Peak intensity 0.6 cd/lm LEDs/each optic White Light colour Required components:

C17580_STRADA-2X2-SHD-WHT








LED XP-G3

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 %

Peak intensity 0.6 cd/lm

LEDs/each optic

Light colour White Required components:



CREE &

LED XP-G3

FWHM / FWTM Asymmetric


Efficiency 82 %

Peak intensity 0.6 cd/lm

LEDs/each optic 1 White Light colour

Required components:

C17677_STRADA-2X2-SHD-BLK



CREE \$

LED XP-L HD


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric

Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic Light colour White

Required components:



CREE \$

XP-L HI


FWHM / FWTM Asymmetric 94 %

Efficiency Peak intensity 0.6 cd/lm

LEDs/each optic

White Light colour

Required components:








LED XP-L2

FWHM / FWTM Asymmetric Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White Required components:



CREE \$

LED XT-E

FWHM / FWTM Asymmetric


Efficiency 93 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:



CREE &


LED XT-E HVW

FWHM / FWTM Asymmetric

Efficiency %

LEDs/each optic 1 Light colour White

Required components:





LED EHP-2x8-3535


FWHM / FWTM Asymmetric

Efficiency 97 %

Peak intensity 0.5 cd/lm LEDs/each optic 1

Light colour White


Required components:







LED EHP-2x8-5050 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 97 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour White




LUMILEDS

Required components:


LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:



LUMILEDS

LUXEON MZ LED $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White




MUMILEDS


Required components:

Required components:

LED LUXEON Q FWHM / FWTM Asymmetric 94 % Efficiency Peak intensity 0.7 cd/lm LEDs/each optic White Light colour






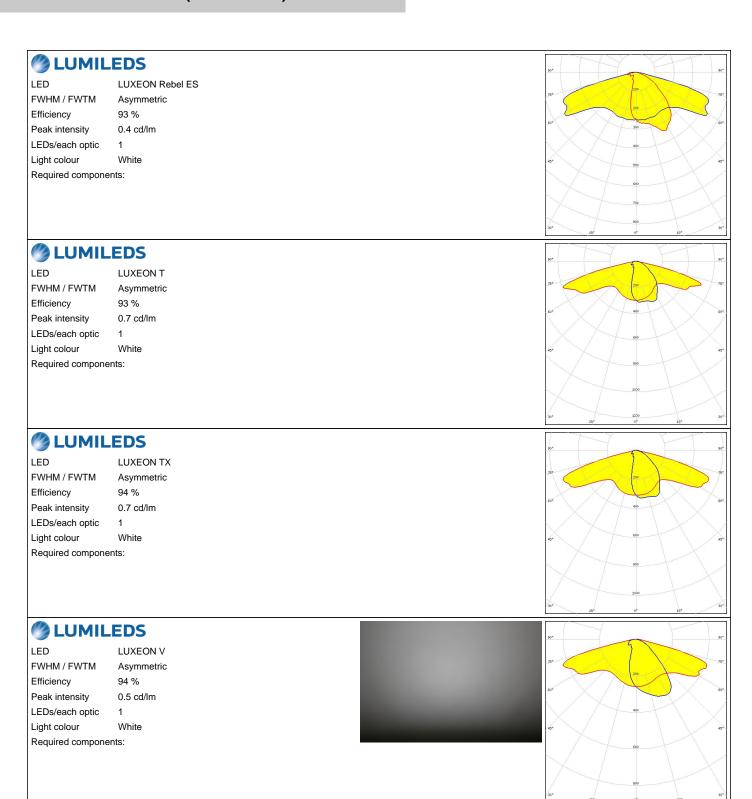





LED LUXEON V2
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White




Your solution

Required components:

LED RecLED 122x50mm 1900lm 730 2x4 Opt G1


FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NS9x383
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm


LEDs/each optic 1
Light colour White
Required components:




WNICHIA

LED NVSW219D
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1

Light colour White Required components:





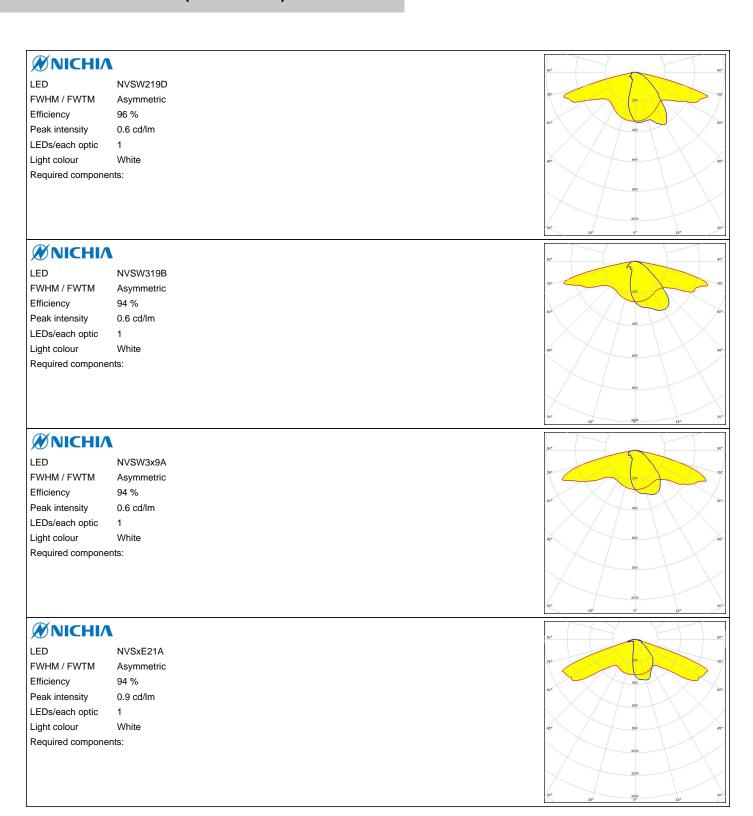




WNICHIA

LED NVSxx19B/NVSxx19C


FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White Required components:



WNICHIA


LED NWSx229A FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1

White Light colour Required components:



LED PL-BRICK HP 3800 2x8 SSG


FWHM / FWTM Asymmetric Efficiency 95 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White Required components:



OSRAM

PrevaLED Brick HP 2x8

FWHM / FWTM Asymmetric 94 % Efficiency Peak intensity 0.7 cd/lm LEDs/each optic White Light colour Required components:





OSRAM


LED

Duris S8 FWHM / FWTM Asymmetric

Efficiency 97 % Peak intensity 0.5 cd/lm

LEDs/each optic

Light colour White Required components:




OSRAM

LED Duris S8 FWHM / FWTM Asymmetric Efficiency 88 % Peak intensity 0.4 cd/lm LEDs/each optic

1 White Light colour Required components:

Protective plate, glass




OSRAM Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm LEDs/each optic Light colour White

Required components:



OSRAM


LED

OSLON Square PC

FWHM / FWTM Asymmetric Efficiency 85 % Peak intensity 0.5 cd/lm LEDs/each optic

White Light colour Required components:

Protective plate, glass






OSRAM

LED OSLON Square PC

FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White




PHILIPS

Required components:

LED Fortimo FastFlex LED 2x8 DA G4


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White




PHILIPS

Required components:

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:






PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4


FWHM / FWTM Asymmetric
Efficiency 94 %
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RC12 Z (LH181B)


FWHM / FWTM Asymmetric
Efficiency 99 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RH12 Z (LH351C)


FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RH16 (LH351C)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:






SAMSUNG

LED HILOM RM12 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:



SAMSUNG

LED HILOM RM16 Z (LH502C)

FWHM / FWTM Asymmetric


Efficiency 98 %

Peak intensity 0.4 cd/lm

LEDs/each optic 1

Light colour White


Required components:



SAMSUNG

LED HILOM RM8 Z (LH502C)


FWHM / FWTM Asymmetric
Efficiency 97 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:






SAMSUNG

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic


Light colour White Required components:



SAMSUNG

LED LH351D FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1

White Light colour Required components:




SAMSUNG

LED LH351Z FWHM / FWTM Asymmetric Efficiency 94 %

0.7 cd/lm

LEDs/each optic Light colour White Required components:

Peak intensity




SAMSUNG

FWHM / FWTM Asymmetric 94 % Efficiency

Peak intensity 0.5 cd/lm LEDs/each optic White Light colour


Required components:






LED LED-Pa-L15c2W11c2-xxx-C050-01

FWHM / FWTM Asymmetric Efficiency 97 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White Required components:



SEOUL SEOUL SEMICONDUCTOR

Acrich MJT 4040 LED FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour Required components:




LED **Z**5

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 93 % LEDs/each optic Light colour White Required components:




LED

Z5M1/Z5M2 FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.7 cd/lm LEDs/each optic White Light colour Required components:





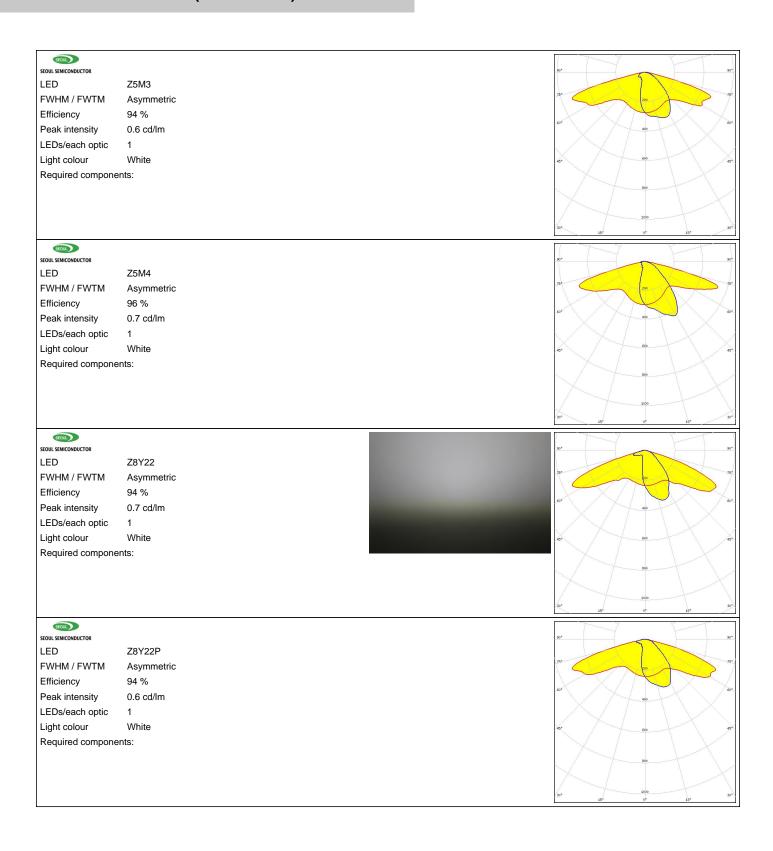




TOSHIBA

Leading Innovation

LED TL1L4
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC


LED RLE 2x4 2000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x121mm 2000lm xxx EXC OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:






TRIDONIC

LED RLE G1 49x133mm 2000lm xxx EXC OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x223mm 4000lm xxx EXC OTD


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



TRIDONIC

LED RLE G1 49x245mm 4000lm xxx EXC OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:






CREE &

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:




CREE &

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:


Protective plate, glass



CREE \$

LED XHP35 HI
FWHM / FWTM Asymmetric
Efficiency 89 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White


Required components:



CREE -

LED XM-L2 FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White
Required components:





CREE &

LED

XP-G2

FWHM / FWTM

Asymmetric 86 %

Efficiency Peak intensity

0.6 cd/lm

LEDs/each optic


.0 00/1111

Light colour

1 White

Required components:

C17580_STRADA-2X2-SHD-WHT



CREE &

LED

XP-G2

FWHM / FWTM

Asymmetric

Efficiency Peak intensity 84 %

LEDs/each optic


0.5 cd/lm 1

Light colour

White

Required components:

Protective plate, glass



CREE \$

LED

XP-G2 HE

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$

Asymmetric

Efficiency

82 %

Peak intensity

0.4 cd/lm

LEDs/each optic


1

Light colour

White

Required components:

C17580_STRADA-2X2-SHD-WHT



CREE ÷

FWHM / FWTM

XP-G2 HE

Efficiency

Asymmetric 92 %


Peak intensity

0.5 cd/lm

LEDs/each optic Light colour

Required components:

White





CREE &

LED XP-G3 FWHM / FWTM

Asymmetric

71 %

Efficiency Peak intensity

0.4 cd/lm

LEDs/each optic

Light colour

White

Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass

CREE \$

LED

XP-G3

FWHM / FWTM

Asymmetric

Efficiency

79 %

Peak intensity

0.4 cd/lm


LEDs/each optic

White

Light colour Required components:

1

Protective plate, glass



CREE \$

LED

XP-G3

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$

Asymmetric

Efficiency

76 %

Peak intensity

0.5 cd/lm

LEDs/each optic

1

Light colour

White

Required components:

C17580_STRADA-2X2-SHD-WHT

Protective plate, glass

CREE \$

FWHM / FWTM

XP-G4

Efficiency


Asymmetric

Peak intensity LEDs/each optic 94 % 0.6 cd/lm

Light colour

Required components:

White





CREE &

LED XP-G4

FWHM / FWTM Asymmetric

Efficiency 81 %

Peak intensity 0.4 cd/lm LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass

CREE \$

LED XP-L2

FWHM / FWTM Asymmetric


Efficiency 79 %

Peak intensity 0.3 cd/lm

LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass



CREE +


LED XQ-E HD

FWHM / FWTM Asymmetric

Efficiency 89 %

LEDs/each optic 1
Light colour White

Required components:



MUMILEDS


LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass



PRODUCT DATASHEET C12362_STRADA-2X2-DWC


OPTICAL RESULTS (SIMULATED):



LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric Efficiency 89 % Peak intensity 0.4 cd/lm LEDs/each optic Light colour White Required components:

C17580_STRADA-2X2-SHD-WHT




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric Efficiency 83 % Peak intensity 0.4 cd/lm LEDs/each optic 1 White Light colour Required components:

C17677_STRADA-2X2-SHD-BLK




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric Efficiency 72 % Peak intensity 0.4 cd/lm LEDs/each optic 1 Light colour White Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric Efficiency 80 % Peak intensity 0.4 cd/lm LEDs/each optic White Light colour Required components:

Protective plate, glass








LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:



MUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric

Efficiency 76 %

Peak intensity 0.4 cd/lm


LEDs/each optic 1

Light colour White

Required components:

C17580_STRADA-2X2-SHD-WHT


Protective plate, glass



UMILEDS

LED LUXEON H50-2 FWHM / FWTM Asymmetric


Efficiency %
LEDs/each optic 1
Light colour White
Required components:



DESCRIPTION LUMILEDS

LED LUXEON HL2X
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:








LED LUXEON HL2Z
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1

White

Required components:


Light colour



MUMILEDS

LED LUXEON HL2Z
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




MILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON XR-HL2X (L2H2-xxxxxxxMLU010)

FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass








RecLED 122x50mm 1900lm 730 2x4 Opt G1

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 83 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components:


Protective plate, glass



WNICHIA

LED NF2x757G FWHM / FWTM Asymmetric Efficiency 81 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:


Protective plate, glass



WNICHIA


LED NV4WB35AM FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White

Required components:



WNICHIA

LED NVSW219F FWHM / FWTM Asymmetric Efficiency 90 % Peak intensity 0.5 cd/lm LEDs/each optic White Light colour Required components:








LED NVSW219F
FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White

Required components:


Protective plate, glass



WNICHIA

LED NVSW519A
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White


Required components:



WNICHIA


LED NVSW519A
FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass



WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White
Required components:







LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 81 %

Peak intensity 0.4 cd/lm
LEDs/each optic 4
Light colour White

Protective plate, glass

Required components:




WNICHIA

LED NVSxx19A
FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1

Light colour White Required components:

Protective plate, glass




WNICHIA

LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass

Required components:




WNICHIA

LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 78 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass


Required components:



OSRAM

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



OSRAM


. __

LED OSCONIQ P 3737 (2W version)

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass

Required components:




OSRAM

Opto Semiconductor

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour White

Required components:




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 74 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT

Protective plate, glass



OSRAM


LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK

Protective plate, glass




OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 85 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT




OSRAM

Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




OSRAM

LED

OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C17580_STRADA-2X2-SHD-WHT






OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

O CONTROLLER

C17677_STRADA-2X2-SHD-BLK



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric

Efficiency 65 %


Peak intensity 0.3 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C17677_STRADA-2X2-SHD-BLK



PHILIPS

LED Fortimo FastFlex LED 2x8 DA G4+

FWHM / FWTM Asymmetric

Efficiency 69 %


Peak intensity 0.3 cd/lm

LEDs/each optic 1

Light colour White

Required components:

C17580_STRADA-2X2-SHD-WHT




PHILIPS

LED Fortimo FastFlex LED 2x8 DA G5

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass






PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric
Efficiency 81 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




PHILIPS

LED Fortimo FastFlex LED 2x8 DA HE

FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:




SAMSUNG

LED HILOM RH12 Z (LH351C)

FWHM / FWTM Asymmetric
Efficiency 82 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




SAMSUNG

Required components:

LED HILOM RM8 Z (LH502C)

FWHM / FWTM Asymmetric
Efficiency 84 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Protective plate, glass



35/40




SAMSUNG

LED LH181B
FWHM / FWTM Asymmetric
Efficiency 92 %

Peak intensity 0.4 cd/lm LEDs/each optic 4

Light colour White

Required components:




SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 69 %
Peak intensity 0.4 cd/lm

LEDs/each optic 1
Light colour White

Required components: C17677_STRADA-2X2-SHD-BLK

Protective plate, glass




SAMSUNG

LED LH351B
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Protective plate, glass




SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 79 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White Required components:

Protective plate, glass






SAMSUNG

LED LM301B
FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.4 cd/lm

LEDs/each optic 4
Light colour White

Required components:

Protective plate, glass




SAMSUNG

LED LM301B
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.4 cd/lm

LEDs/each optic 4
Light colour White


Required components:



SEOUL SEMICONDUCTOR

LED MJT 5050
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

Light colour White Required components:



SEOUL SEMICONDUCTOR

LED SEOUL DC 5050 6V

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.4 cd/lm


LEDs/each optic 1

Light colour White

Required components:





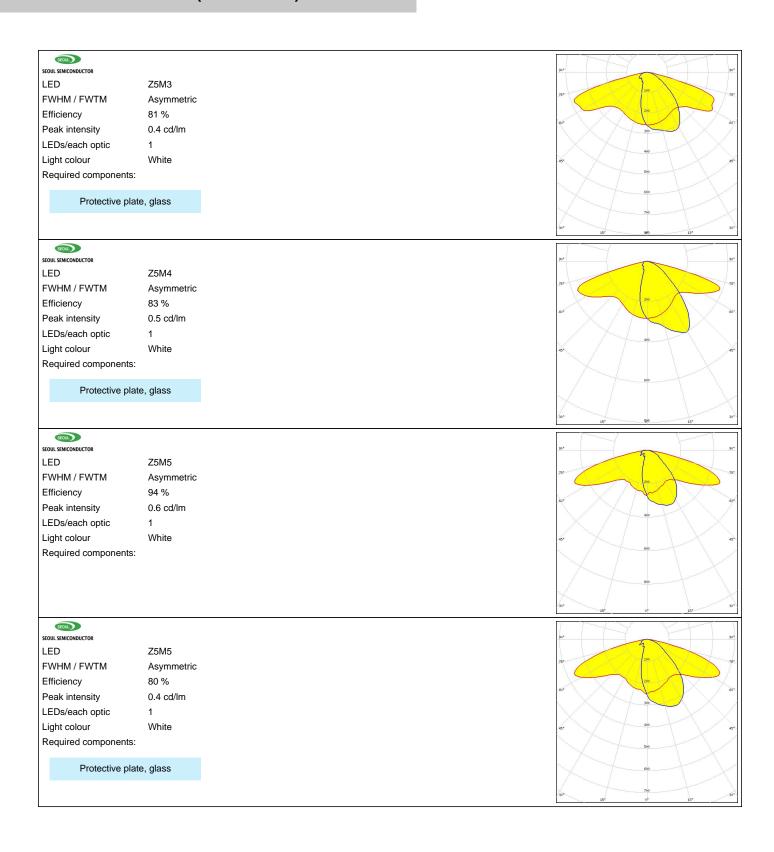






LED Z8Y19
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White

Required components:




TRIDONIC

LED RLE 2x8 4000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 83 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass





PRODUCT DATASHEET C12362 STRADA-2X2-DWC

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

40/40

www.ledil.com/ where_to_buy