

## STRADA-2X2MX-8-VSM

IESNA Type V (square) for wide areas lighting such as car parks. New revision.

### SPECIFICATION:

Dimensions	90.0 x 90.0 mm
Height	13.1 mm
Fastening	screw
Ingress protection classes	IP67
ROHS compliant	yes ⓘ



### MATERIALS:

Component	Type	Material	Colour	Finish	Length
STRADA-2X2MX-8-VSM	Multi-lens	PMMA	clear		90.0
STRADA-2X2MX-8-SEAL	Seal	Silicone	clear		86.5

### ORDERING INFORMATION:


Component		Qty in box	MOQ	MPQ	Box weight (kg)
CS15763_STRADA-2X2MX-8-VSM	Multi-lens	156	52	52	8.6
» Box size: 480 x 280 x 300 mm					



#### OPTICAL RESULTS (MEASURED):




LED XHP50.2  
 FWHM / FWTM 151.0° / 159.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

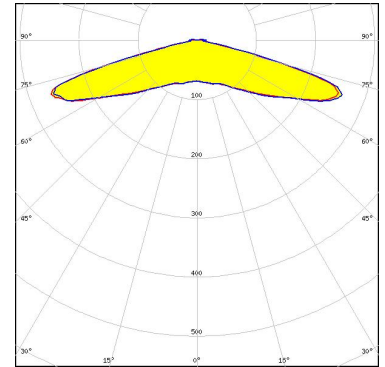

Light distribution files




LED XT-E HE  
 FWHM / FWTM 148.0° / 156.0°  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

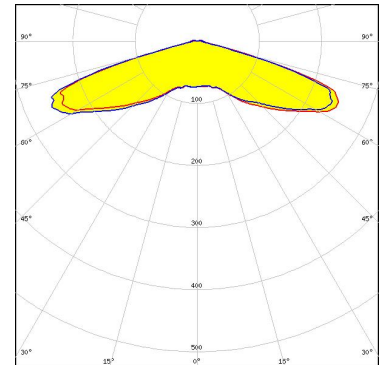

Light distribution files



LED LUXEON M/MX  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

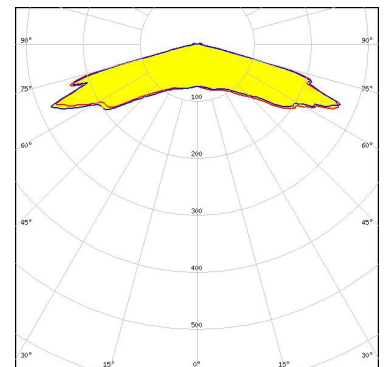


Light distribution files

#### OPTICAL RESULTS (MEASURED):





LED LUXEON XR-7070 (L224-xxxx004MLU010)  
FWHM / FWTM 147.0° / 156.0°  
Efficiency 97 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

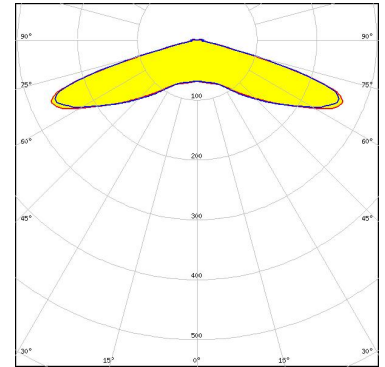

Light distribution files




LED NV9W149AM  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

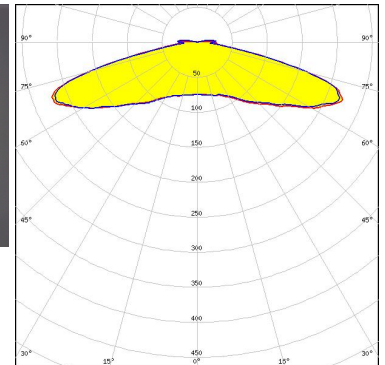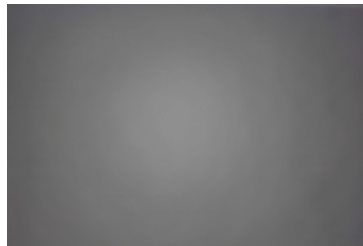

Light distribution files



LED PrevaLED Brick HP 2x2MX  
FWHM / FWTM 145.0° / 153.0°  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

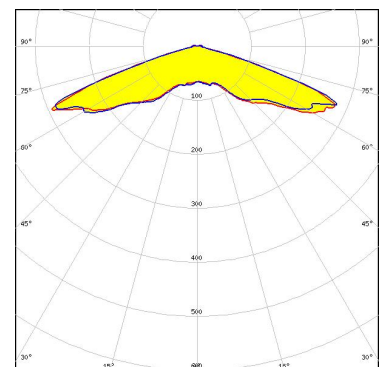


Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED HiLOM SC16 (LH181B)  
FWHM / FWTM 140.0° / 147.0°  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

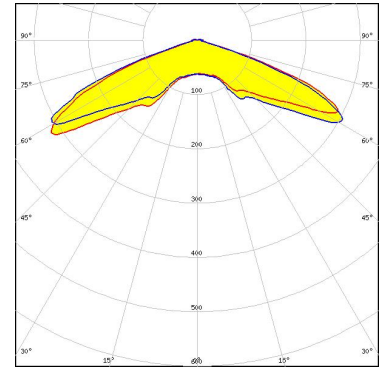

Light distribution files

### SCIOLUX


LED PAL-LK-4950-740-48  
FWHM / FWTM 150.5 + 151.0° / 159.5 + 159.0°  
Efficiency 97 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

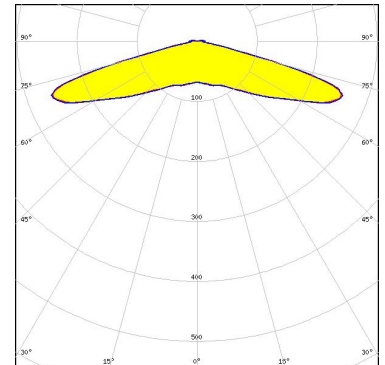

Light distribution files

### SCIOLUX

LED XLE-S22C4XD16 (XD16)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

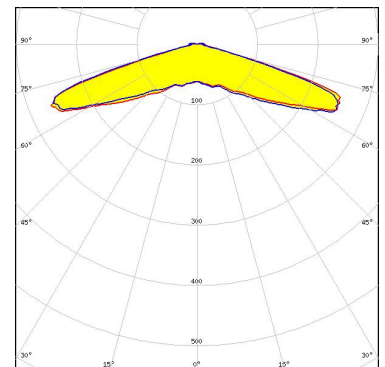


Light distribution files

#### OPTICAL RESULTS (MEASURED):




LED XLE-S22C4XTEHE (XT-E HE)  
FWHM / FWTM 148.0° / 156.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

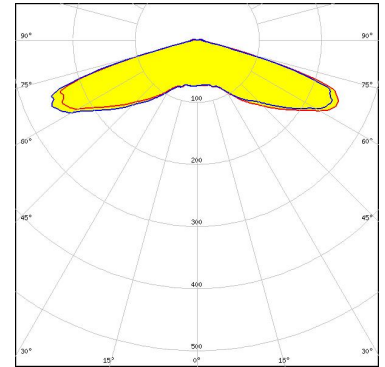

Light distribution files




LED XLE-S22XHP50B (XHP50.2)  
FWHM / FWTM 151.0° / 159.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

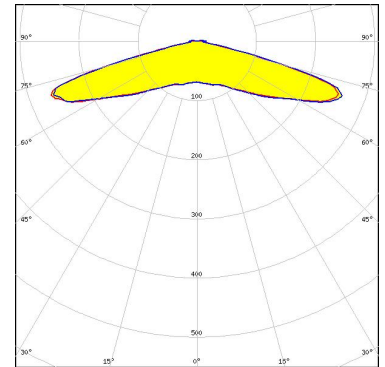

Light distribution files




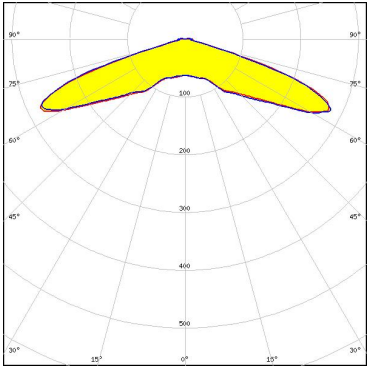
LED WICOP 5050  
FWHM / FWTM 150.0° / 159.0°  
Efficiency 96 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

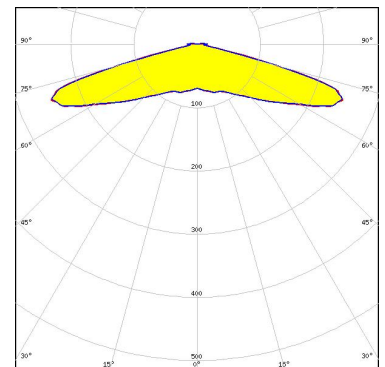

Light distribution files

#### OPTICAL RESULTS (MEASURED):

 SEOL SEMICONDUCTOR	
LED	Z8Y22
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.5 cd/lm
LEDs/each optic	4
Light colour/type	White
Required components:	




Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED Bridgelux SMD 5050  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

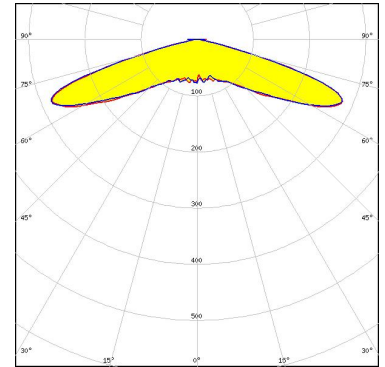

Light distribution files

#### CITIZEN

LED CLU700/701/702/703  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

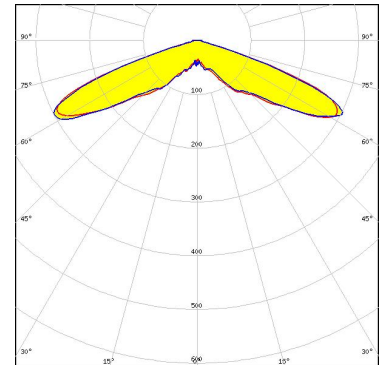


Bender Wirth: 434 Typ 2x2MX HV

Light distribution files



LED CMA1303  
FWHM / FWTM 142.0° / 152.0°  
Efficiency 95 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

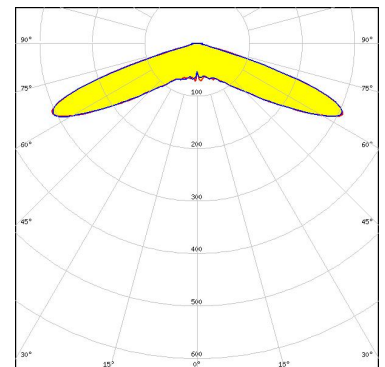

Bender Wirth: 488 Typ L4 HV


Light distribution files



#### OPTICAL RESULTS (SIMULATED):




LED J Series 5050B 30V K Class  
FWHM / FWTM 148.0° / 158.0°  
Efficiency 89 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

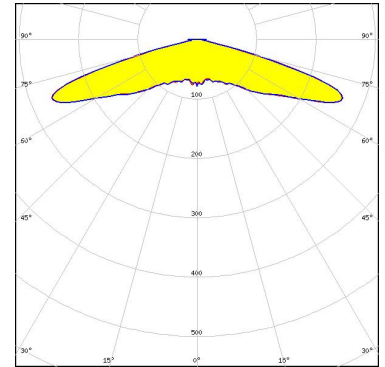

Light distribution files




LED MHB-A/B  
FWHM / FWTM 152.0° / 160.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

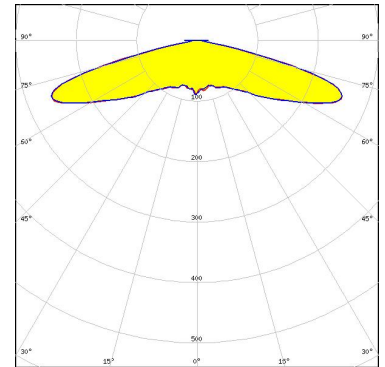

Light distribution files



LED XHP70.3 HD  
FWHM / FWTM 152.0° / 160.0°  
Efficiency 94 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

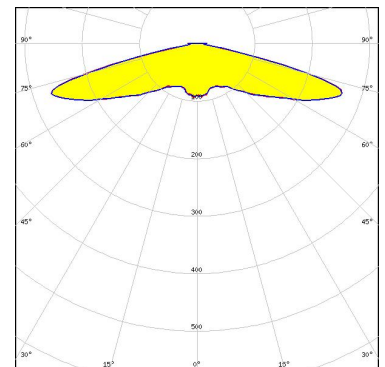


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XT-E  
FWHM / FWTM 148.0° / 180.0°  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

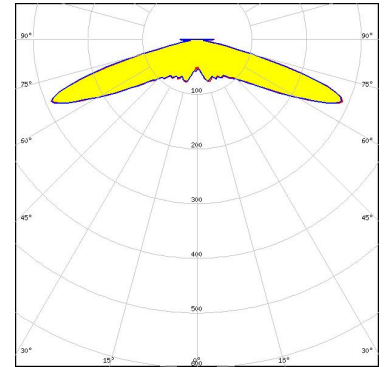

Light distribution files




LED LUXEON 5050 Round LES  
FWHM / FWTM 146.0° / 154.0°  
Efficiency 95 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

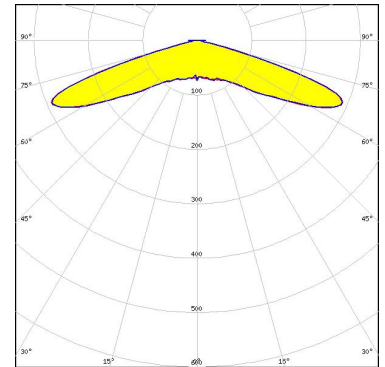

Light distribution files



LED LUXEON 7070  
FWHM / FWTM 150.0° / 158.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

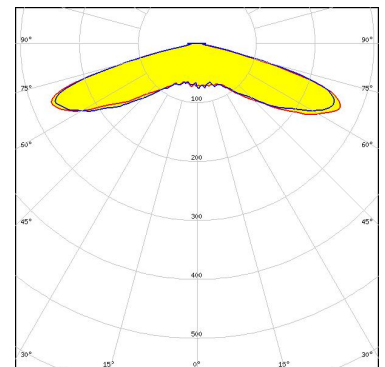


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED MP 7070  
FWHM / FWTM 148.0° / 156.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

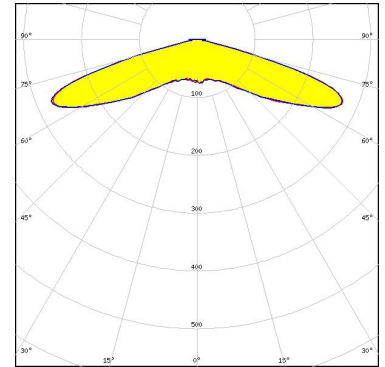

Light distribution files




LED NF2x757G  
FWHM / FWTM 148.0° / 156.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

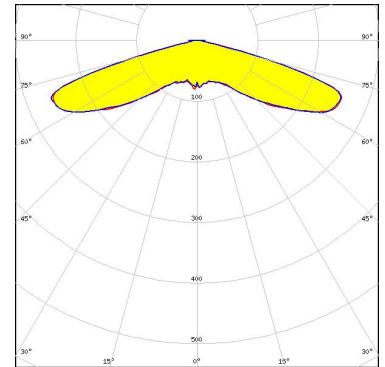

Light distribution files



LED NFMW48xA  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 45 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

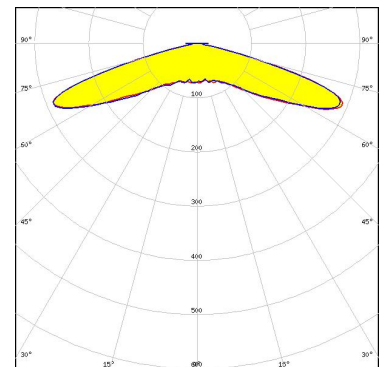


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM  
FWHM / FWTM 148.0° / 162.0°  
Efficiency 95 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

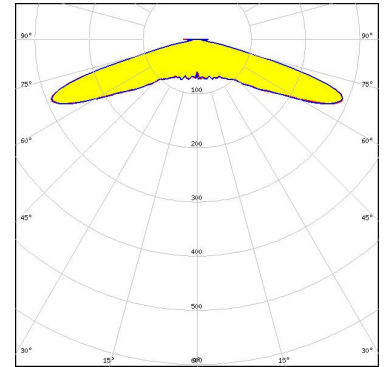

Light distribution files




LED NVSxE21A  
FWHM / FWTM 148.0° / 156.0°  
Efficiency 95 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 9  
Light colour/type White  
Required components:

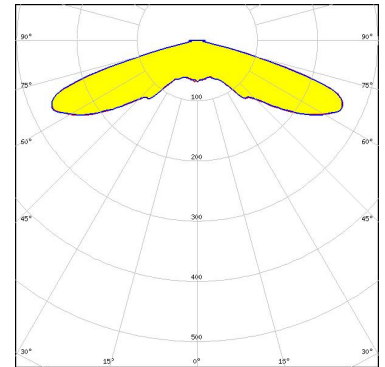

Light distribution files



LED NVSxE21A  
FWHM / FWTM 146.0° / 154.0°  
Efficiency 95 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 4  
Light colour/type White  
Required components:

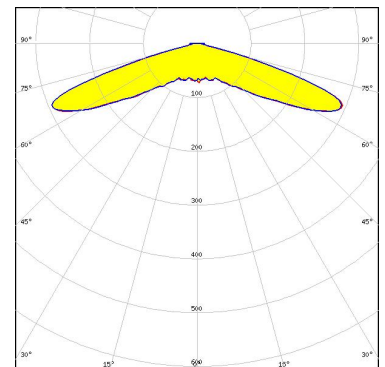


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ C 2424  
 FWHM / FWTM 148.0° / 156.0°  
 Efficiency 95 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

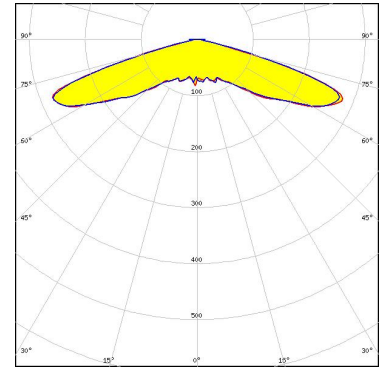

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSCONIQ P 7070  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

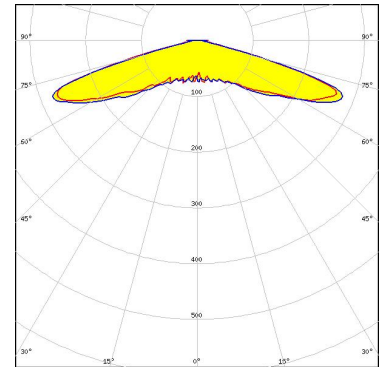

Light distribution files


**SEMI**  
SEOUL SEMICONDUCTOR


LED Z8Y19  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 4  
 Light colour/type White  
 Required components:

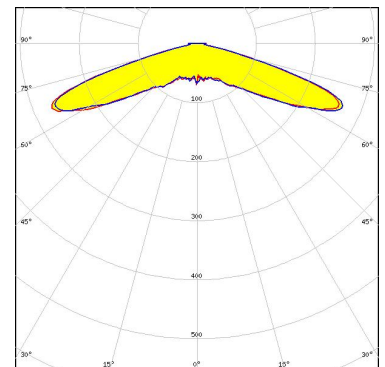

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

 SEUL SEMICONDUCTOR	
LED	Z8Y22
FWHM / FWTM	Asymmetric
Efficiency	94 %
Peak intensity	0.6 cd/lm
LEDs/each optic	4
Light colour/type	White
Required components:	

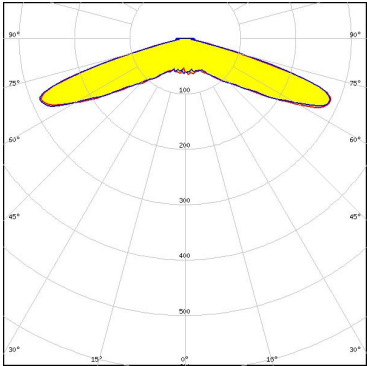

Light distribution files

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)