
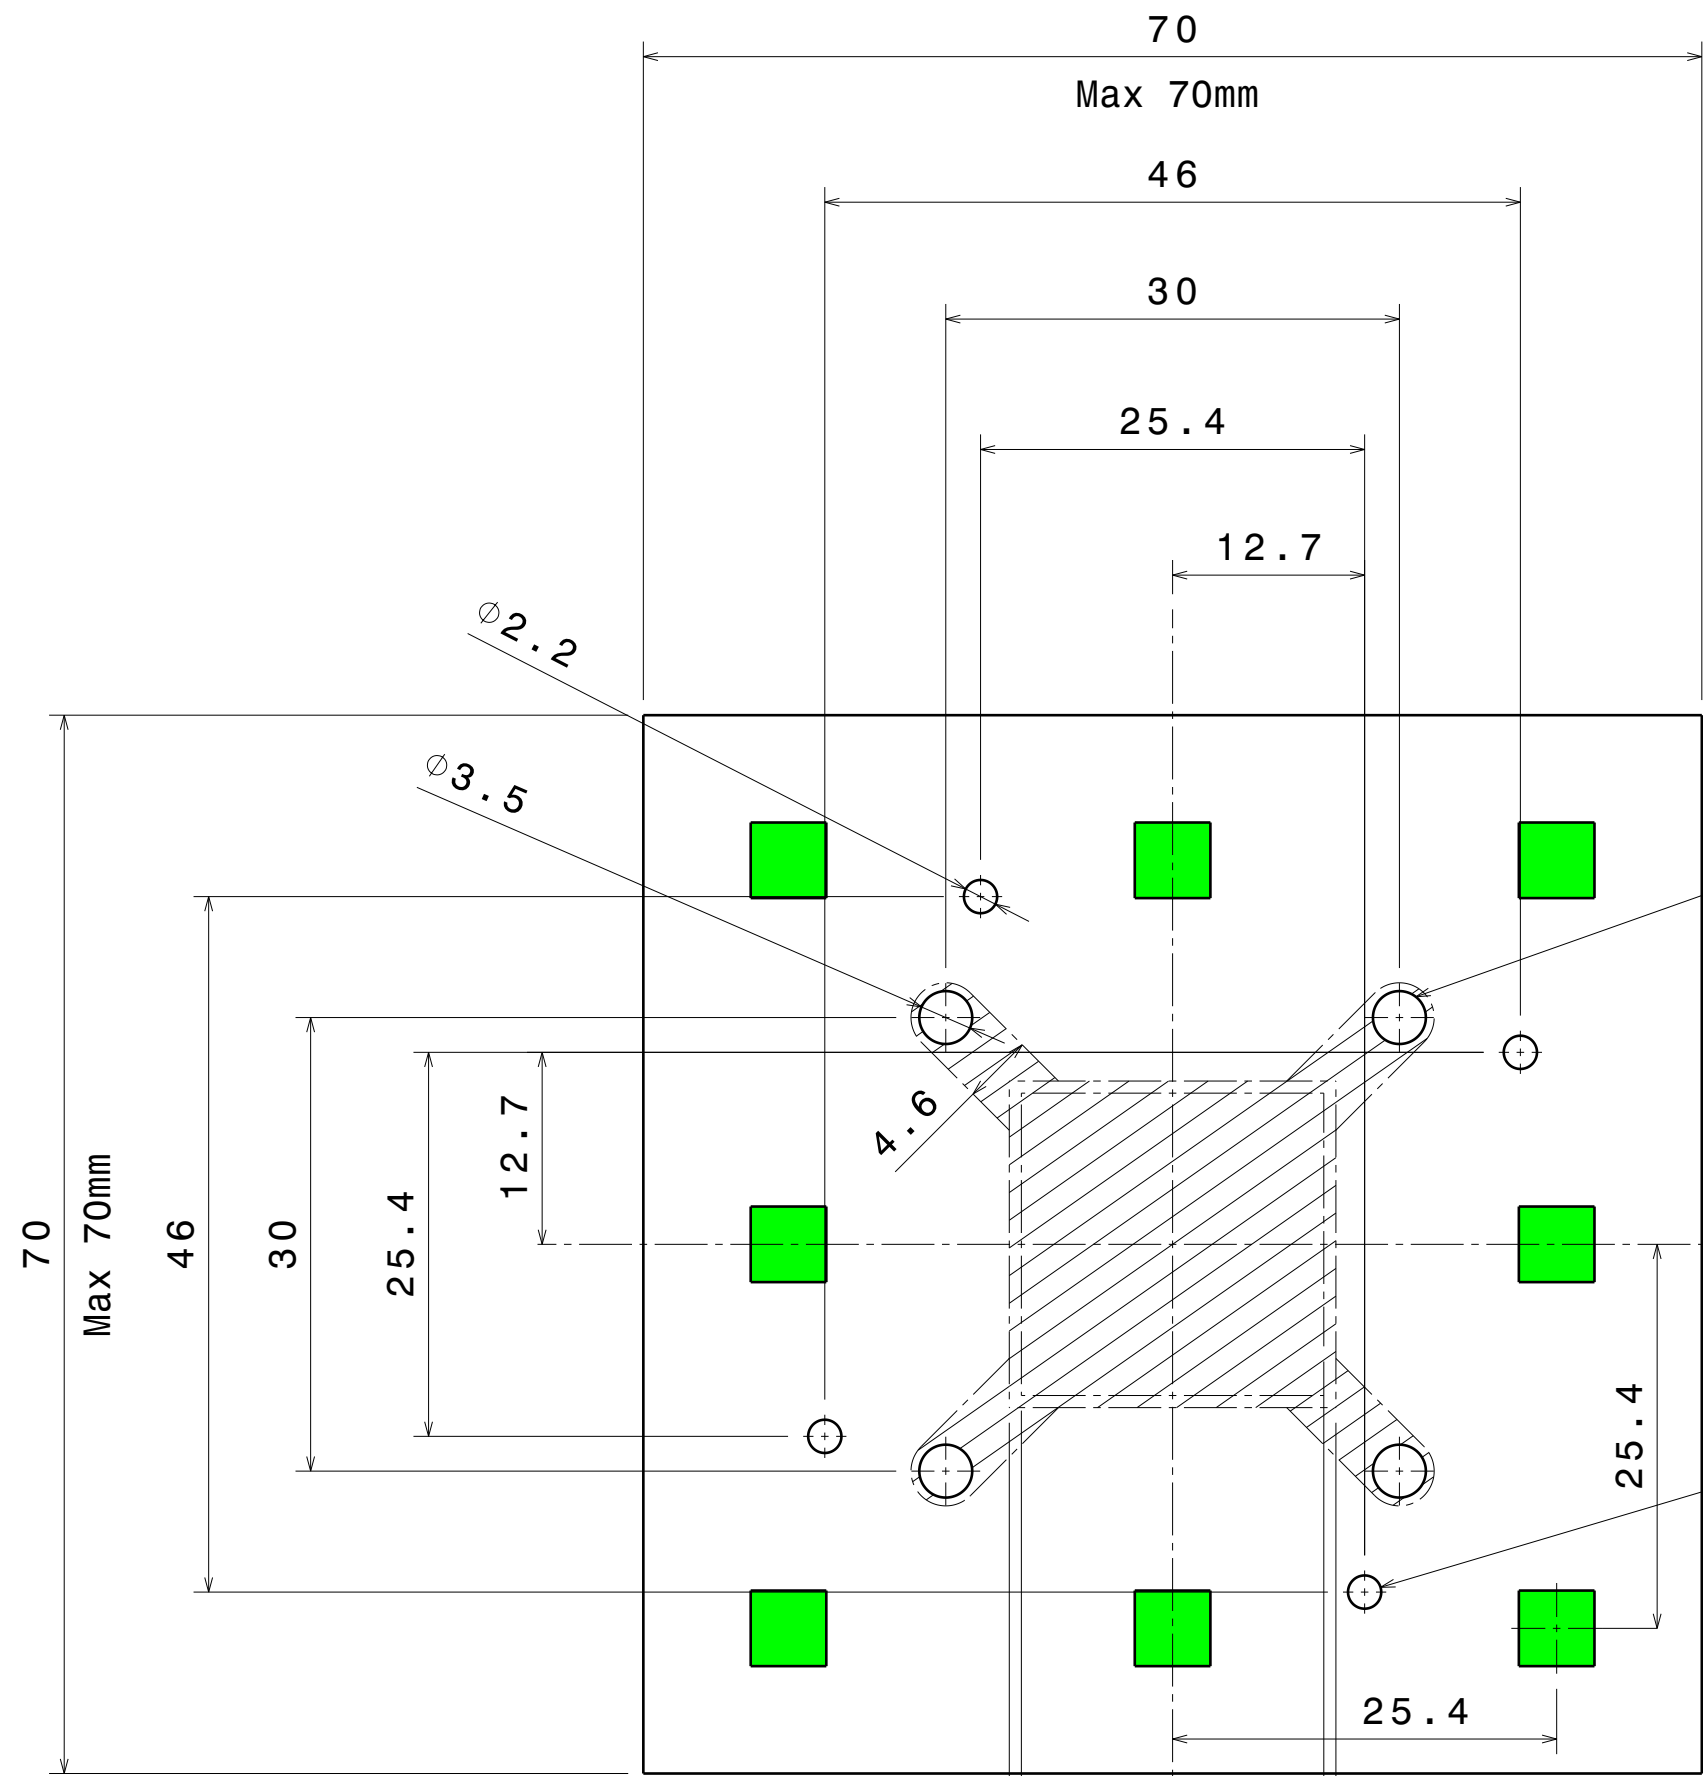


It is recommended to rotate LED from position to position.

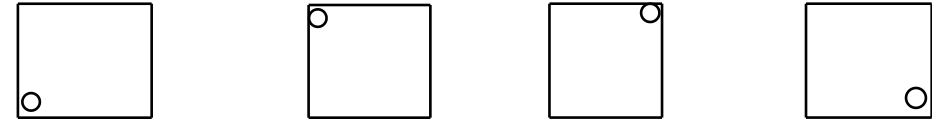


Front view
Scale: 2:1


20 x 20 h=4.9
21.6 x 21.6 h=4.0

Cut out for screw
(4pcs x size M3, max
screw head size $\phi 6$ mm)

Cut out for position pin
(4pcs x $\phi 2$ mm)

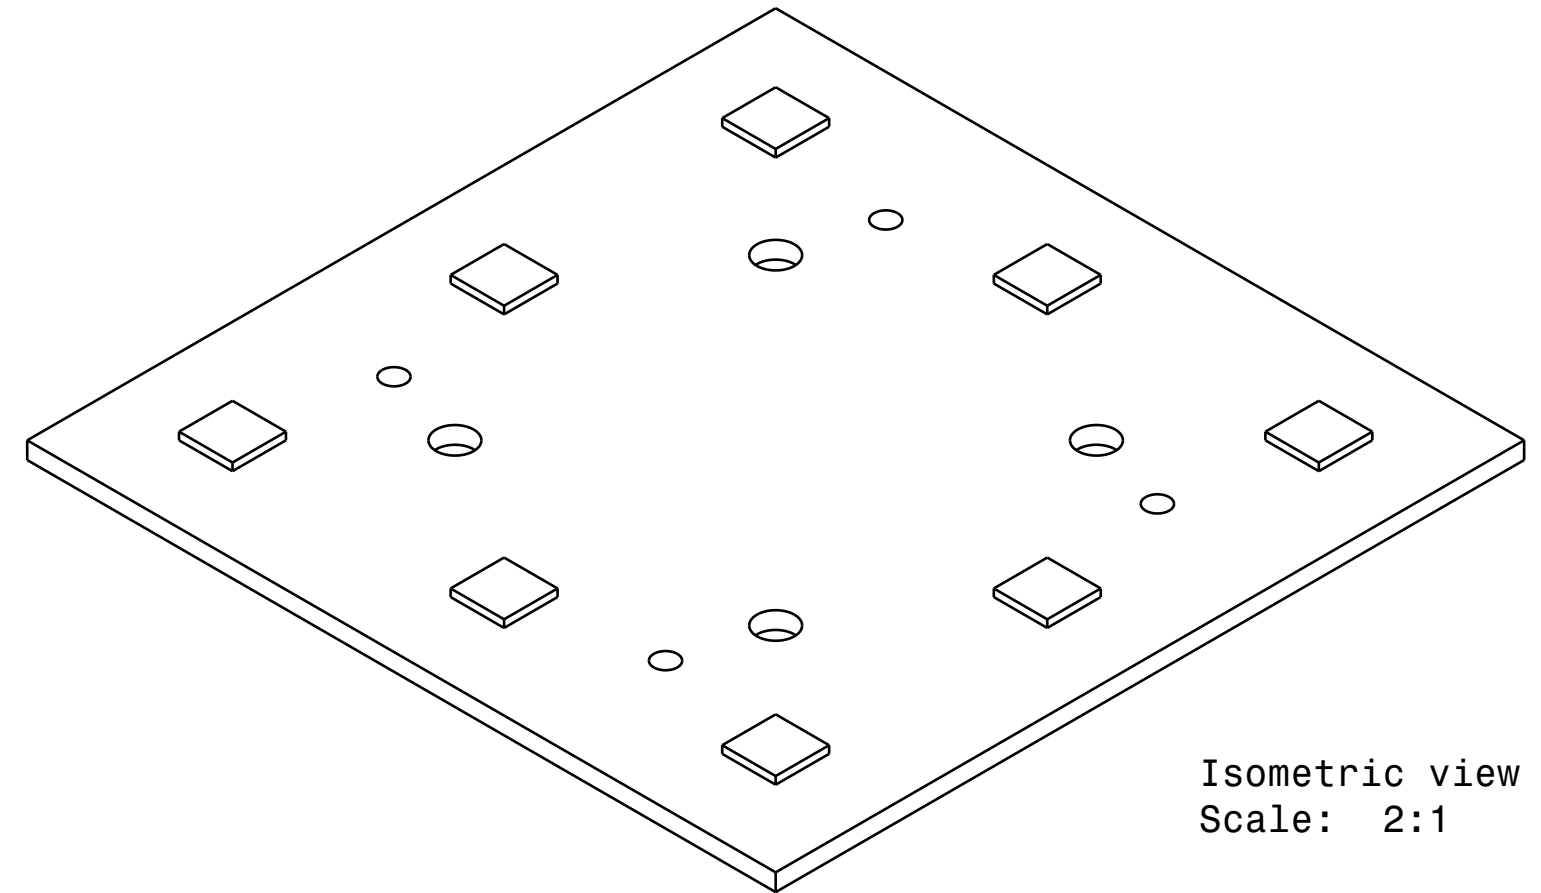

Isometric view
Scale: 2:1

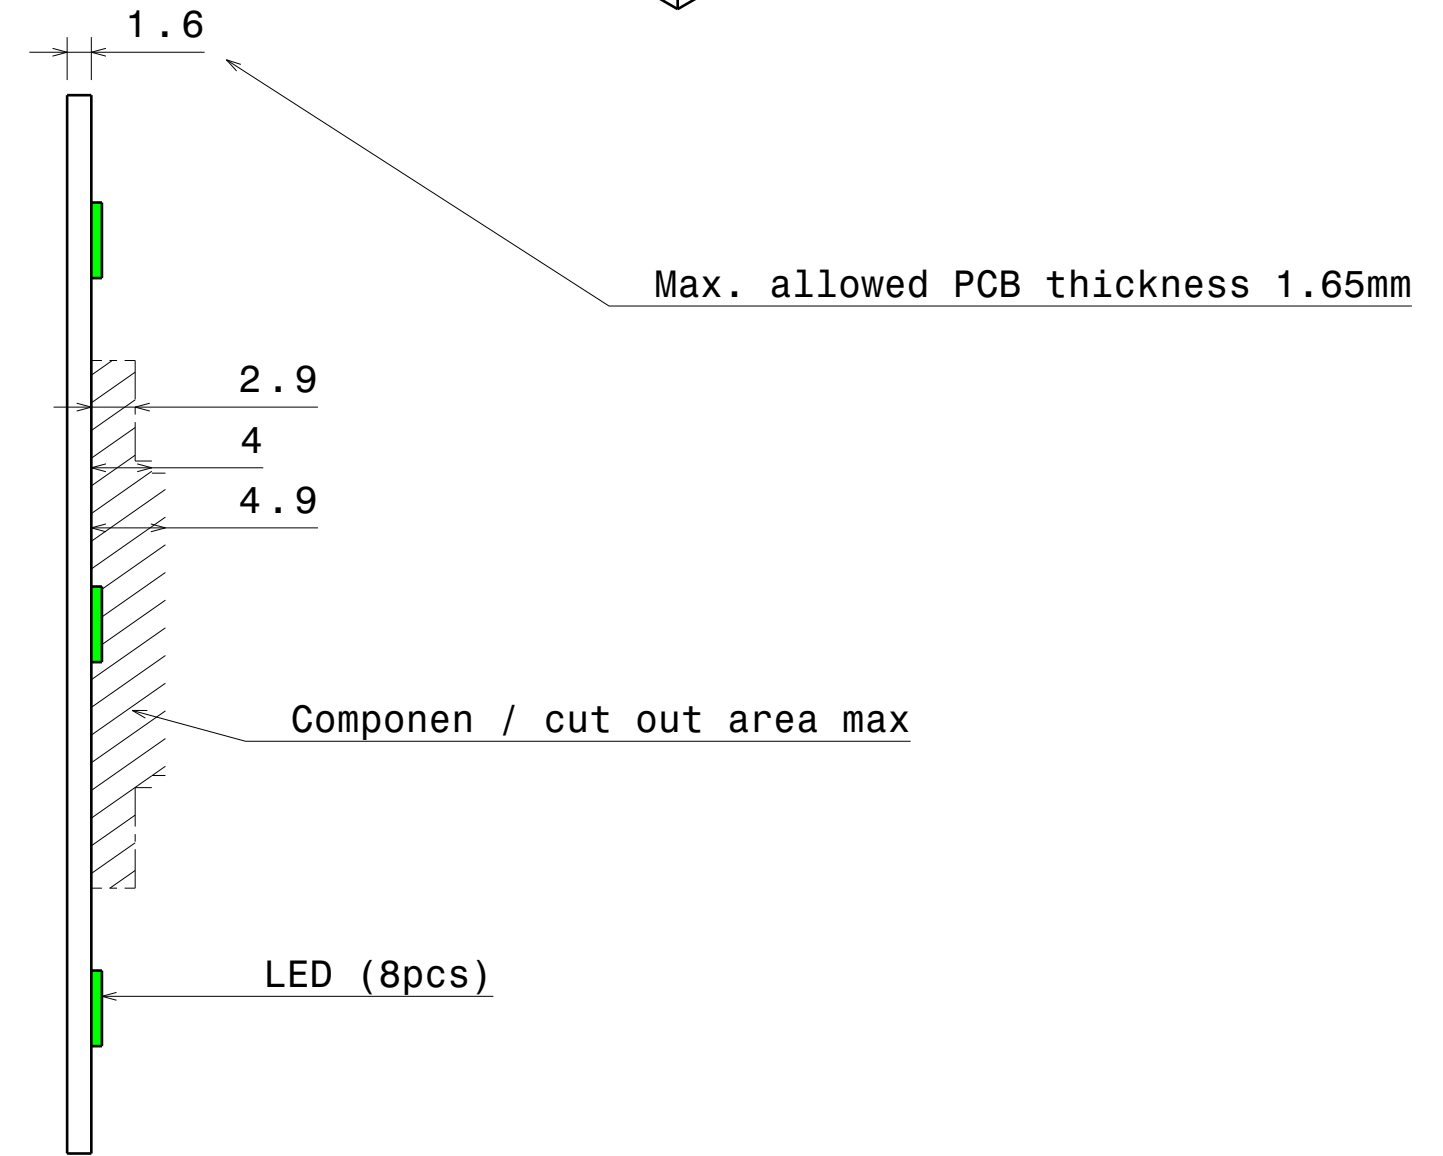


Left view
Scale: 2:1

Notes

LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com

PART	TYPE	MATERIAL	COLOR / COATING
STRADA-IP-8MXS-PCB	Printed circuit board	-	-

MECHANICAL DRAWING		LEDiL
PRODUCT -		
Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.	FIRST ANGLE PROJECTION: 	This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.
SCALE 1:1	WEIGHT -	A2 SHEET 1/1