

## STRADELLA-16-T2

IESNA Type II (medium) beam, applicable for European P-class standard pedestrian lighting and M-class roads

### SPECIFICATION:

Dimensions	49.5 x 49.5 mm
Height	4.7 mm
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
STRADELLA-16-T2	Multi-lens	PMMA	clear		

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C16751_STRADELLA-16-T2 » Box size: 480 x 280 x 300 mm	800	160	160	6.5

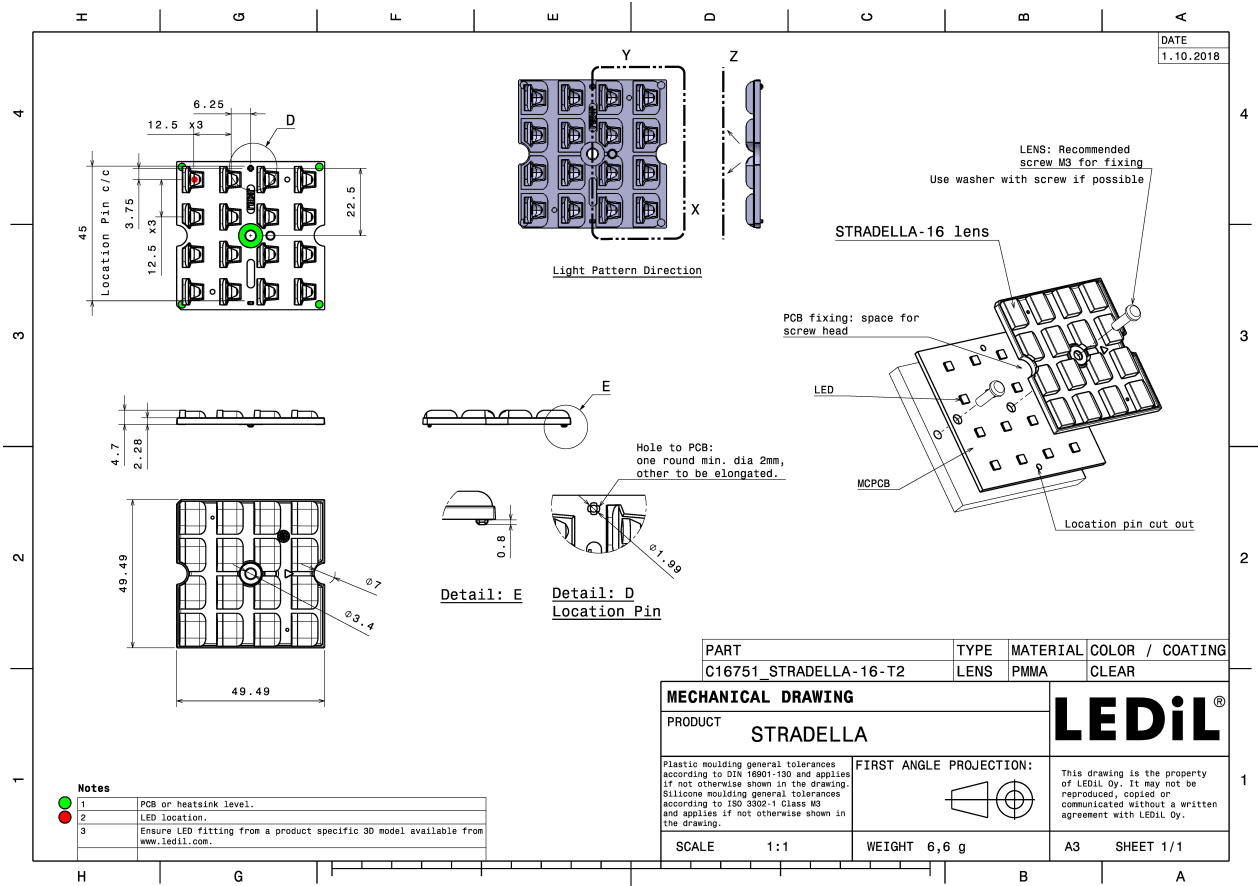


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):




LED J Series 3030  
FWHM / FWTM Asymmetric  
Efficiency 95 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

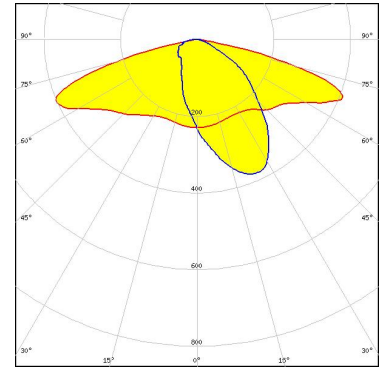

Light distribution files




LED EHP-223.5x50-1604-xx-70-LS30-06-NTC  
FWHM / FWTM Asymmetric  
Efficiency 97 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

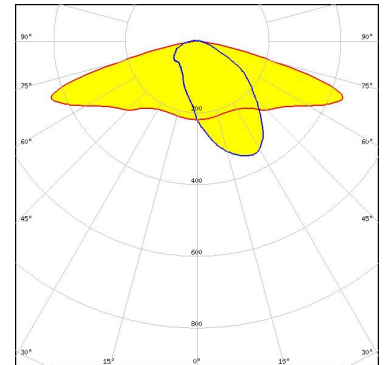

Light distribution files



LED LM301B  
FWHM / FWTM Asymmetric  
Efficiency 84 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

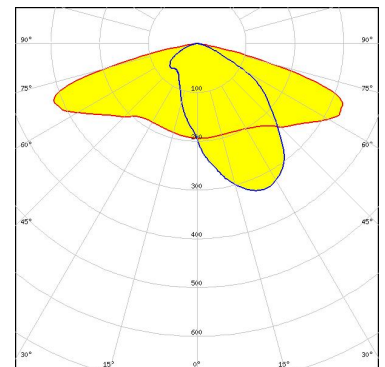


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SAMSUNG


LED LM301B  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

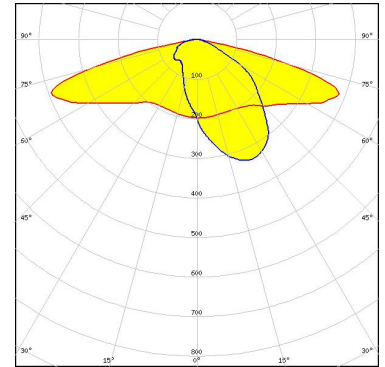

Light distribution files

### SCIOLUX


LED XLE-S44XTEHE (XT-E HE)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

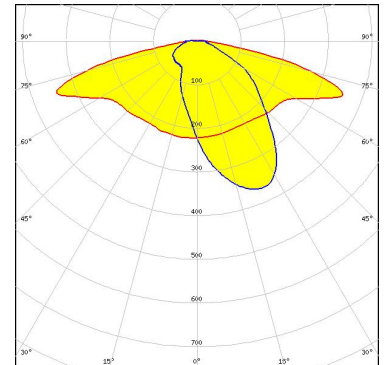

Light distribution files

### SCIOLUX

LED XLE-S48XPG3 (XP-G3)  
FWHM / FWTM Asymmetric  
Efficiency 83 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

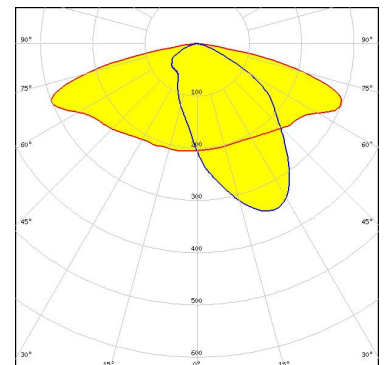


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (MEASURED):

### SCIOLUX


LED XLE-S48XPG3 (XP-G3)  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

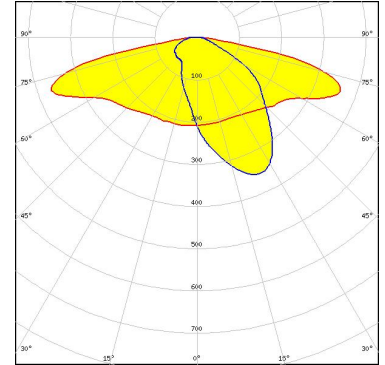

Light distribution files

### SEOLUX SEOUL SEMICONDUCTOR


LED Z5M3  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

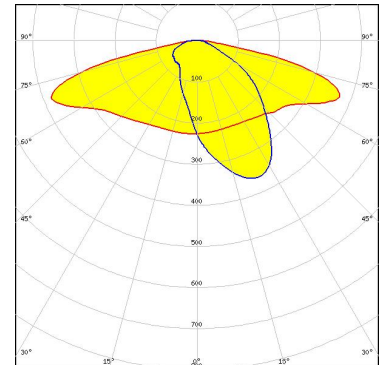

Light distribution files

### TRIDONIC

LED RLE 4x16 4000lm MP ADV2 OTD  
FWHM / FWTM Asymmetric  
Efficiency 94 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

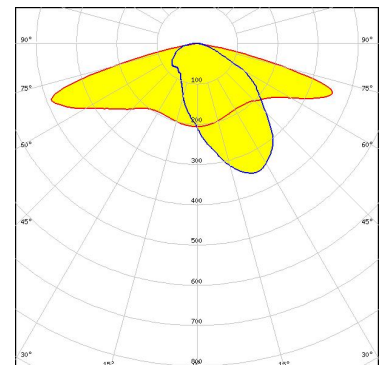


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED CSP 2727 (BXCP)  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

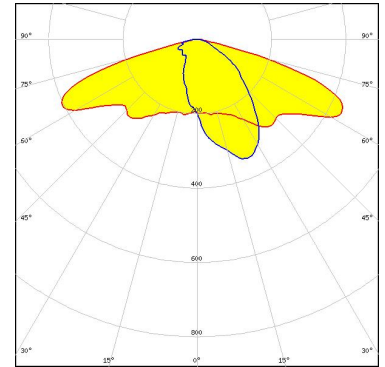

Light distribution files



LED CSP 2727 (BXCP)  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

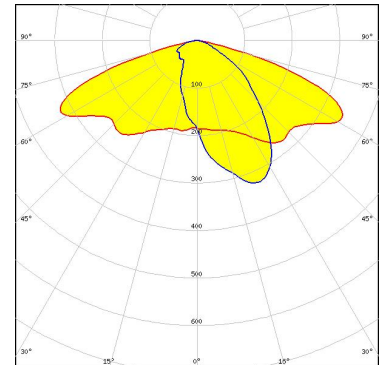


Protective plate, glass

Light distribution files



LED J Series 2835  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

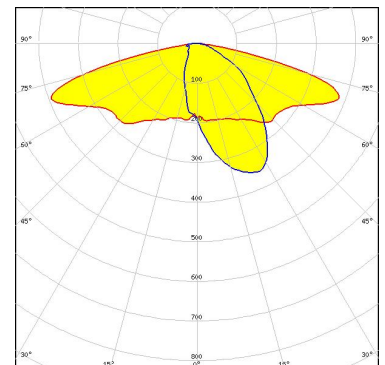


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED J Series 2835  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

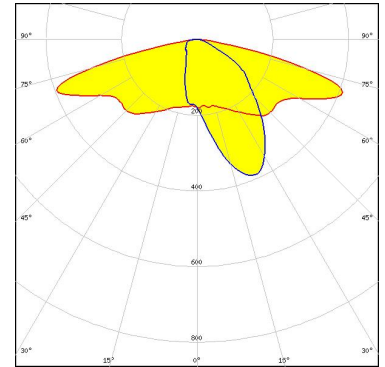

Light distribution files



LED J Series 3030  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

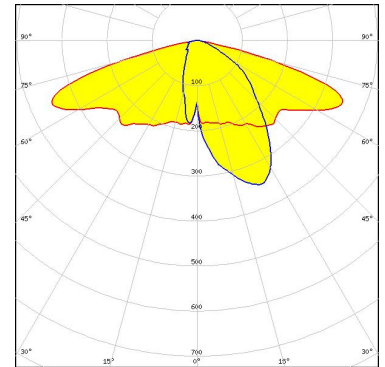

Protective plate, glass

Light distribution files



LED J Series 3030C  
FWHM / FWTM Asymmetric  
Efficiency 80 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED J Series 3030C  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

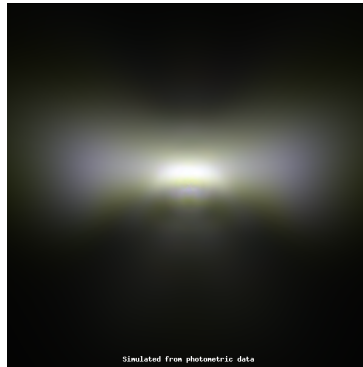

Light distribution files



LED XP-G3  
 FWHM / FWTM Asymmetric  
 Efficiency 77 %  
 Peak intensity 0.3 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

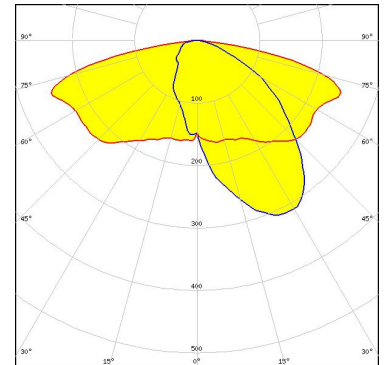


Protective plate, glass

Light distribution files



LED LUXEON 2835 Line  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

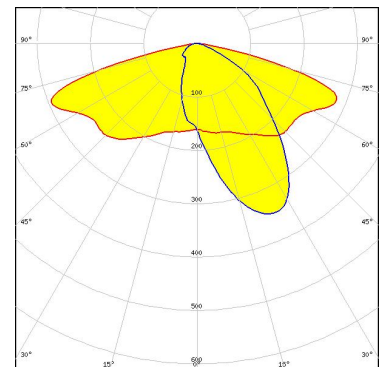

Protective plate, glass


Light distribution files



#### OPTICAL RESULTS (SIMULATED):




LED LUXEON 2835 Line  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

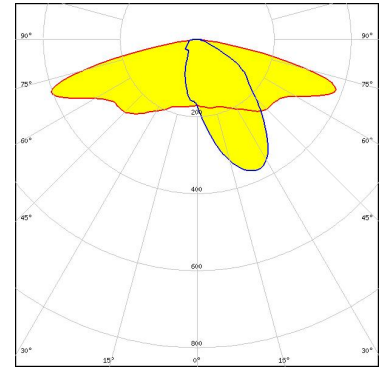

Light distribution files



LED LUXEON 3030 2D (Square LES)  
FWHM / FWTM Asymmetric  
Efficiency 81 %  
Peak intensity 0.4 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

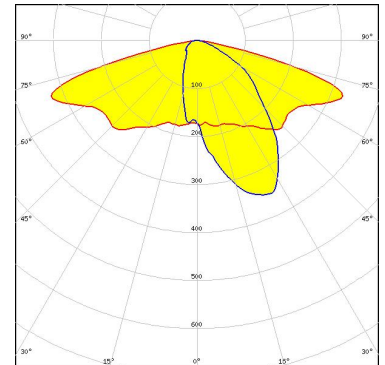


Protective plate, glass

Light distribution files



LED LUXEON 3030 HE Plus  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

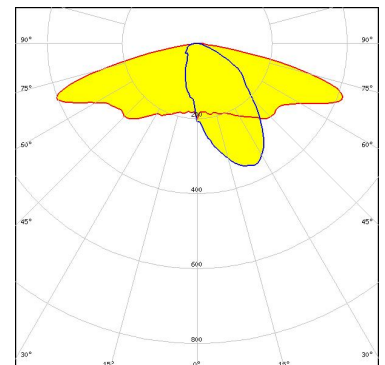


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED LUXEON C  
FWHM / FWTM Asymmetric  
Efficiency 89 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour/type RGBW  
Required components:

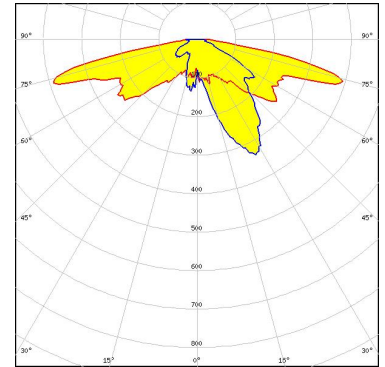

Light distribution files




LED LUXEON C  
FWHM / FWTM Asymmetric  
Efficiency 88 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

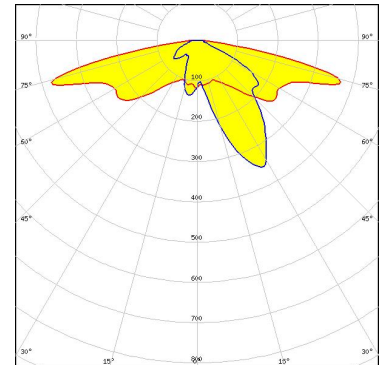

Light distribution files



LED LUXEON CZ  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour/type RGBW  
Required components:

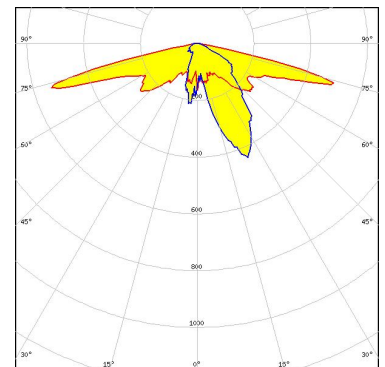


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**LUMILEDS**


LED: LUXEON TX  
 FWHM / FWTM: Asymmetric  
 Efficiency: 90 %  
 Peak intensity: 0.5 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: White  
 Required components:

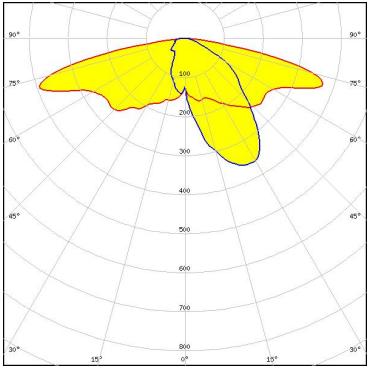

Light distribution files

**NICHIA**

LED: NF2W757G-MT (Tunable White)  
 FWHM / FWTM: Asymmetric  
 Efficiency: 92 %  
 Peak intensity: 0.5 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: Tunable White  
 Required components:

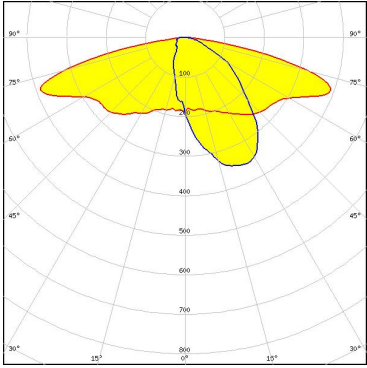


Light distribution files

**NICHIA**




LED: NF2W757G-MT (Tunable White)  
 FWHM / FWTM: Asymmetric  
 Efficiency: 80 %  
 Peak intensity: 0.4 cd/lm  
 LEDs/each optic: 1  
 Light colour/type: Tunable White  
 Required components:

Protective plate, glass

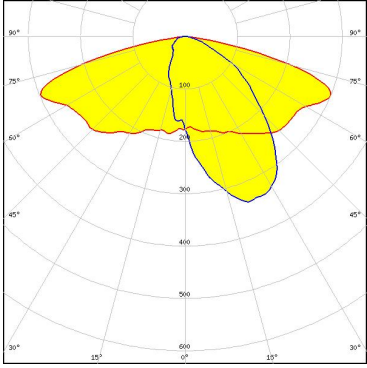

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

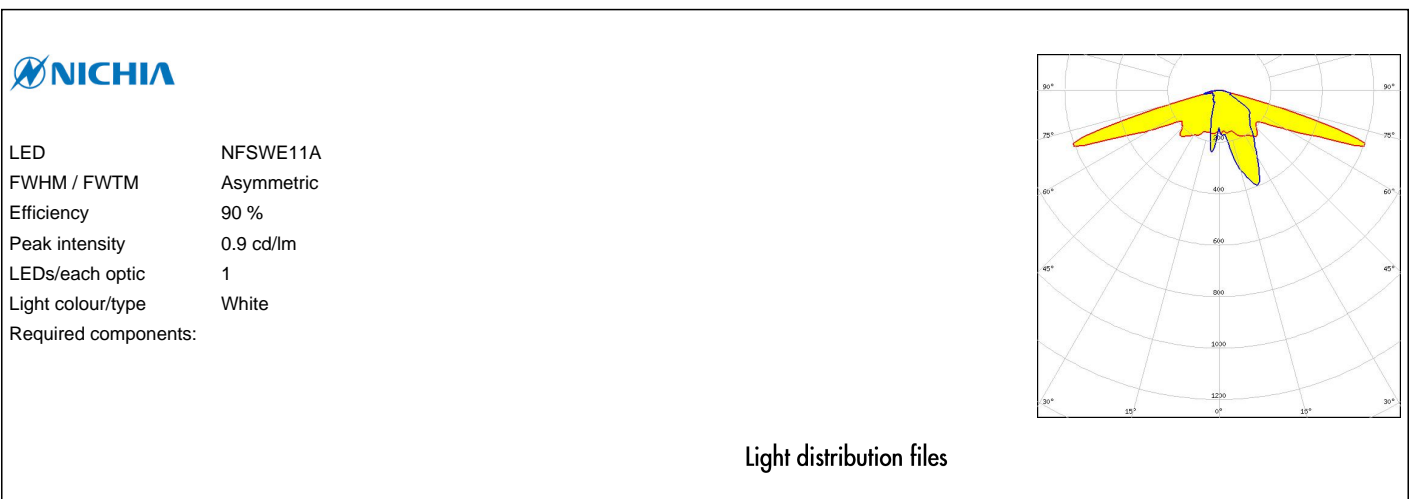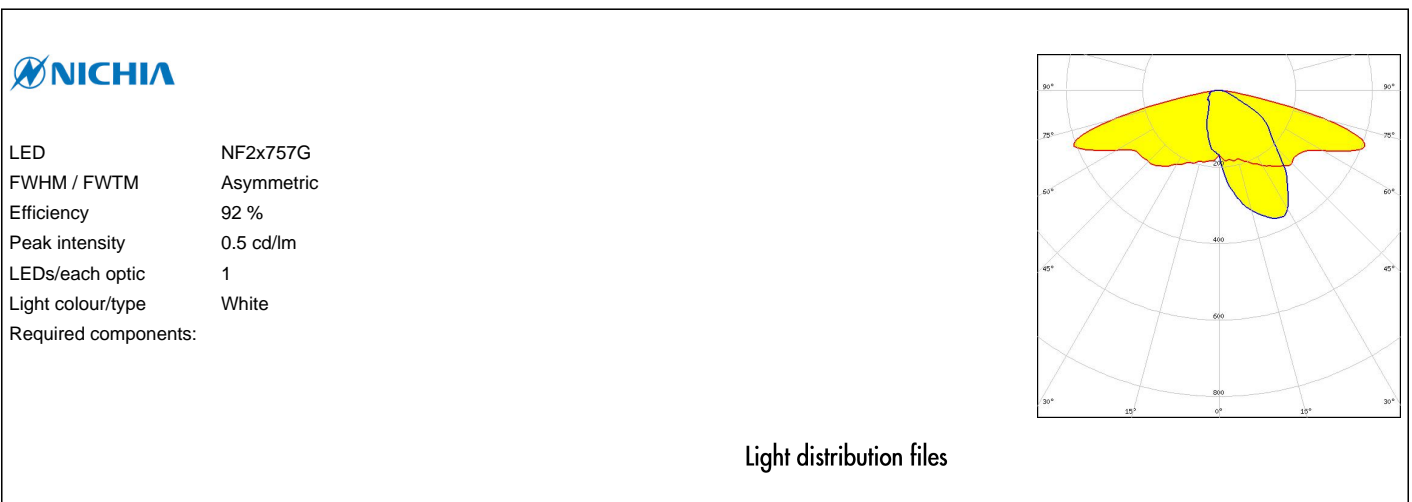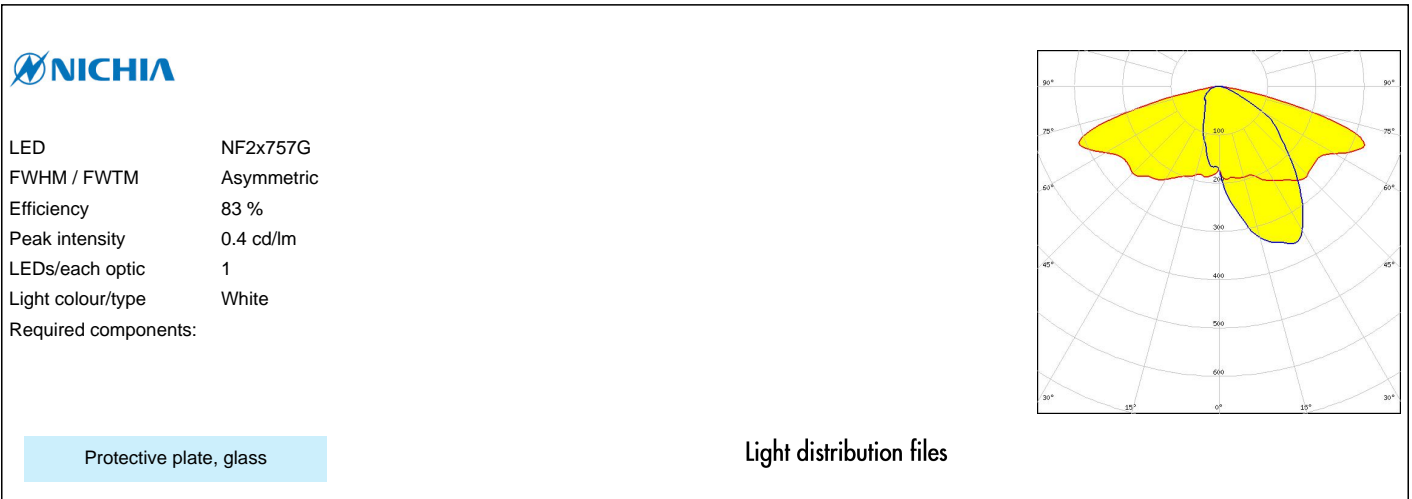

#### OPTICAL RESULTS (SIMULATED):



LED	NVSxE21A
FWHM / FWTM	Asymmetric
Efficiency	91 %
Peak intensity	0.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files




Osram Opto Semiconductors

LED	Duris S5 (2 chip)
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass

Light distribution files

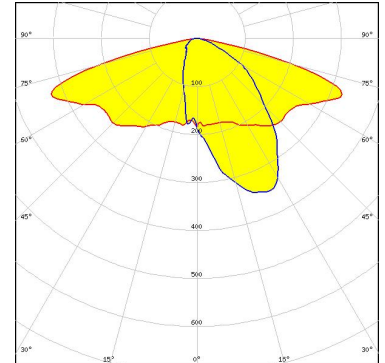


Osram Opto Semiconductors

LED	OSCONIQ C 2424
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

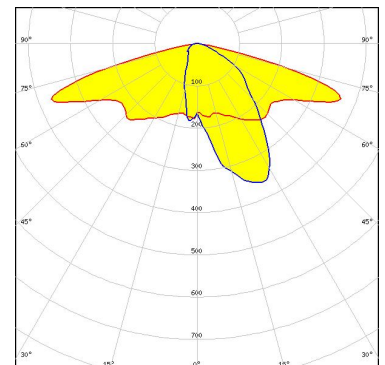

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ C 2424  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

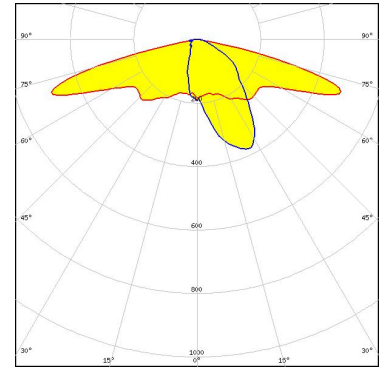

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSCONIQ C 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

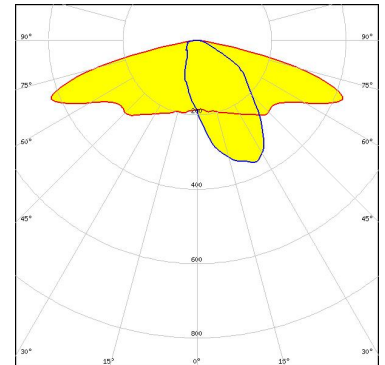

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSCONIQ C 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

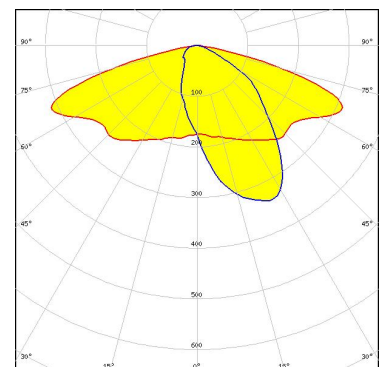


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSCONIQ P 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

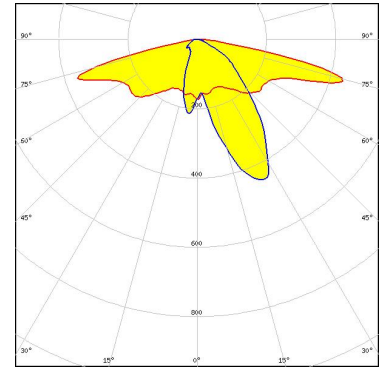

Light distribution files

**OSRAM**  
Opto Semiconductors


LED OSLON Pure 1414  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

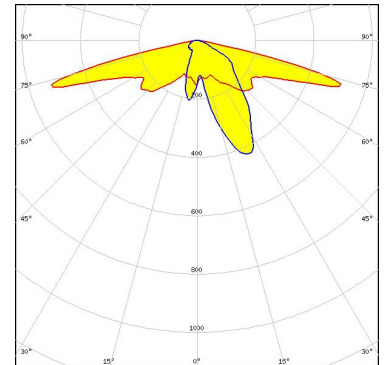

Light distribution files

**OSRAM**  
Opto Semiconductors

LED OSLON Pure 1414  
 FWHM / FWTM Asymmetric  
 Efficiency 78 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

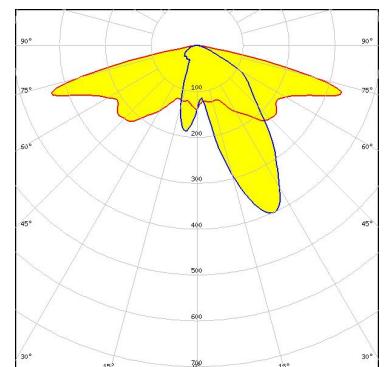


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

**OSRAM**  
Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

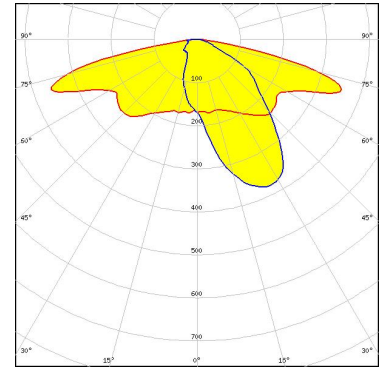

Light distribution files

**PHILIPS**


LED Fortimo FastFlex LED 4x16 DHE G4  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

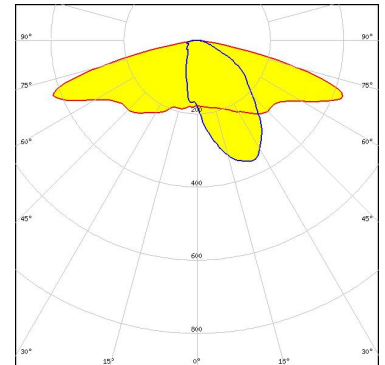

Light distribution files

**PHILIPS**

LED Fortimo FastFlex LED 4x16 DHE G4  
 FWHM / FWTM Asymmetric  
 Efficiency 84 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

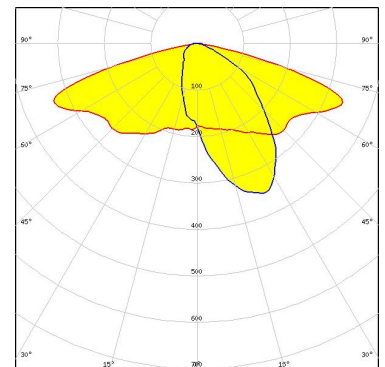

Protective plate, glass


Light distribution files



#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH181B  
FWHM / FWTM Asymmetric  
Efficiency 93 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

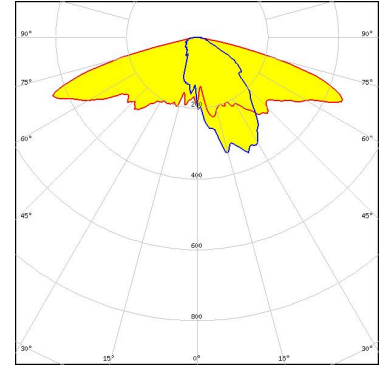

Light distribution files

### SAMSUNG


LED LH181B  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

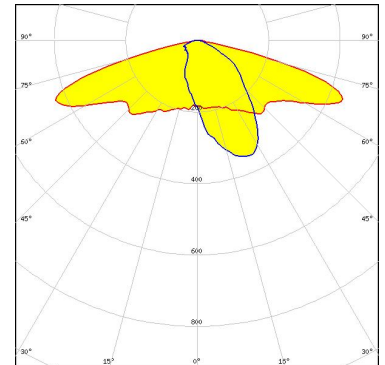

Light distribution files

### SAMSUNG

LED LH181B  
FWHM / FWTM Asymmetric  
Efficiency 85 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

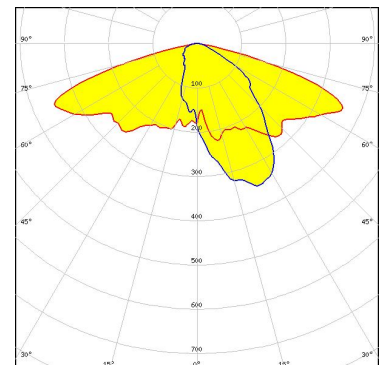


Protective plate, glass

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG


LED LH351B  
FWHM / FWTM Asymmetric  
Efficiency 91 %  
Peak intensity 0.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

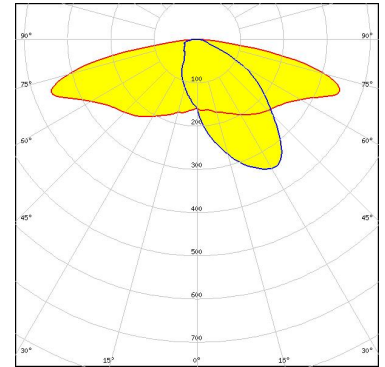

Light distribution files

### SAMSUNG


LED LM101B  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.8 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

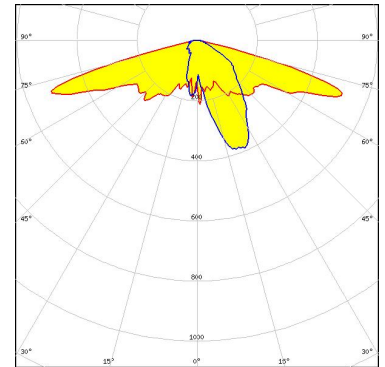

Light distribution files

### SAMSUNG

LED LM28xB Series  
FWHM / FWTM Asymmetric  
Efficiency 92 %  
Peak intensity 0.6 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

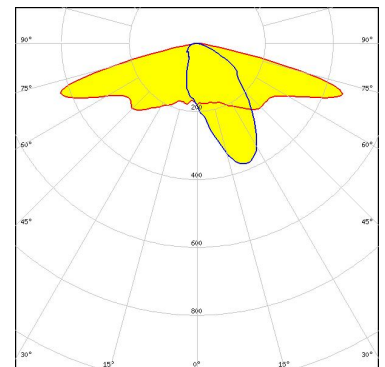

Light distribution files

#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED	LM301B
FWHM / FWTM	Asymmetric
Efficiency	80 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

### SAMSUNG

LED	LM302D
FWHM / FWTM	Asymmetric
Efficiency	79 %
Peak intensity	0.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Protective plate, glass


Light distribution files

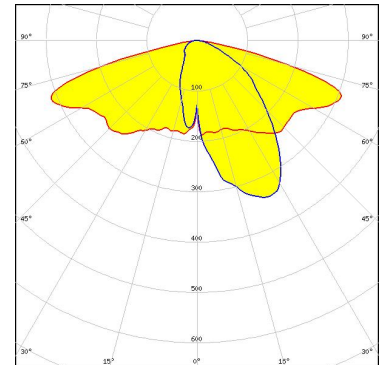

### SAMSUNG

LED	LM302D
FWHM / FWTM	Asymmetric
Efficiency	93 %
Peak intensity	0.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

Light distribution files

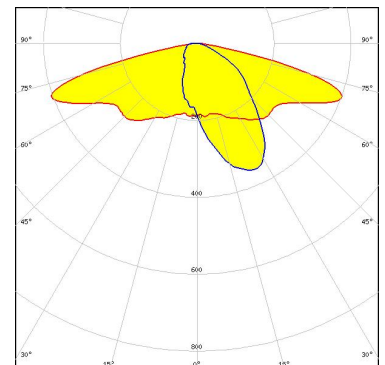


#### OPTICAL RESULTS (SIMULATED):

### SAMSUNG

LED LM302Z plus  
 FWHM / FWTM Asymmetric  
 Efficiency 79 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass


Light distribution files

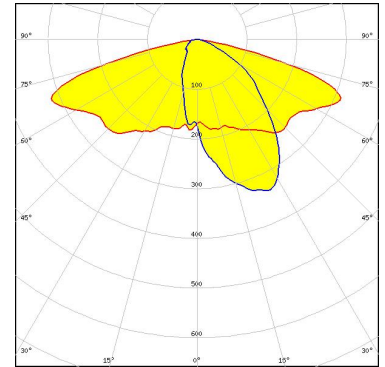

### SAMSUNG

LED LM302Z plus  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 0.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:


Light distribution files

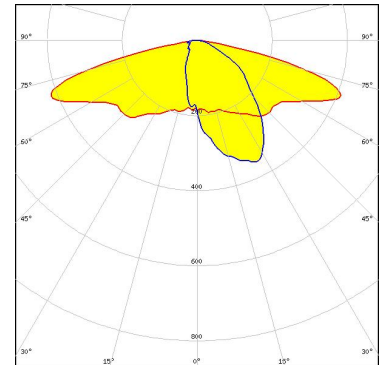



LED SEOUL DC 3030C  
 FWHM / FWTM Asymmetric  
 Efficiency 80 %  
 Peak intensity 0.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

Protective plate, glass




Light distribution files

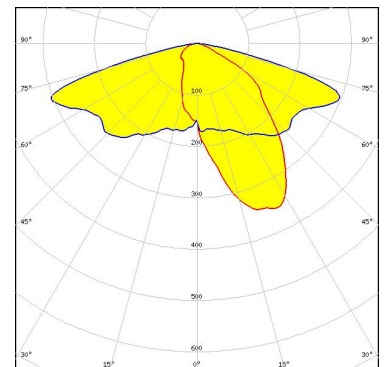


#### OPTICAL RESULTS (SIMULATED):

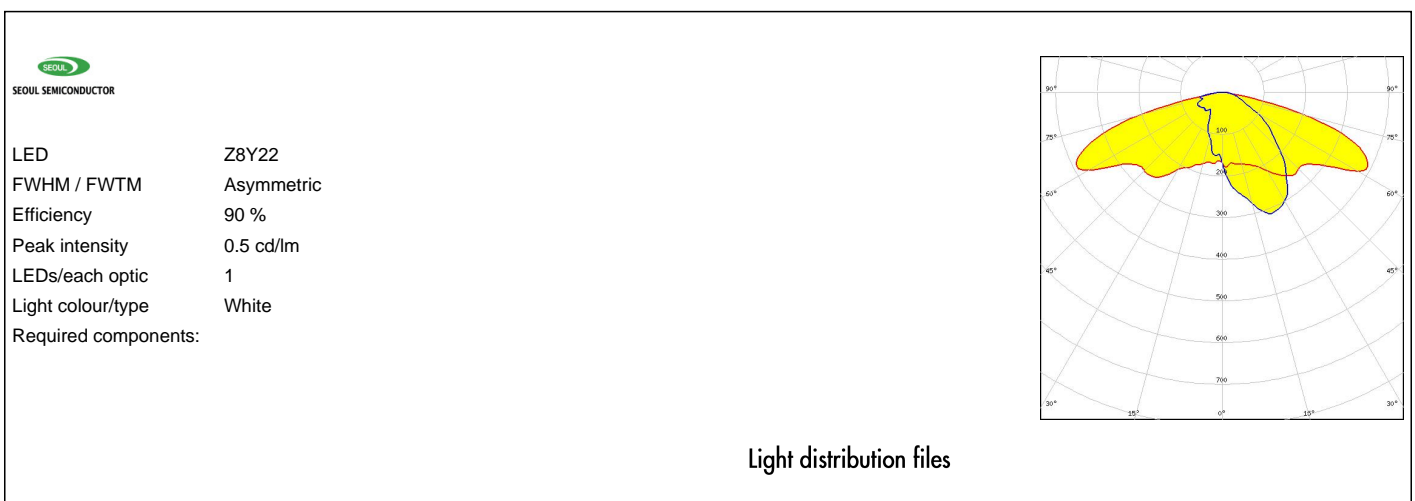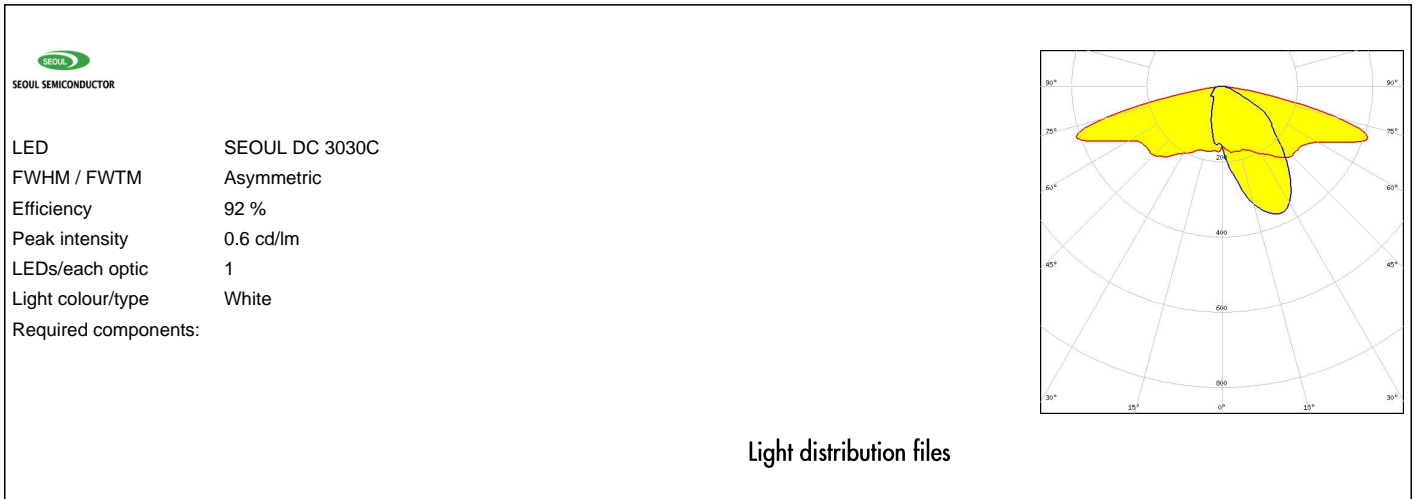

#### OPTICAL RESULTS (SIMULATED):

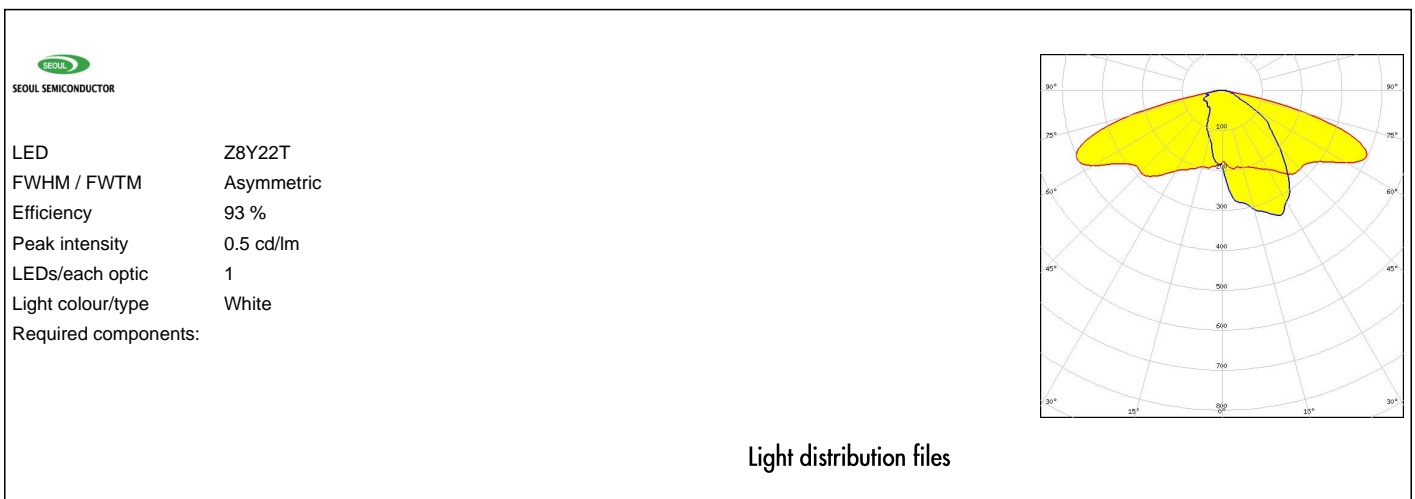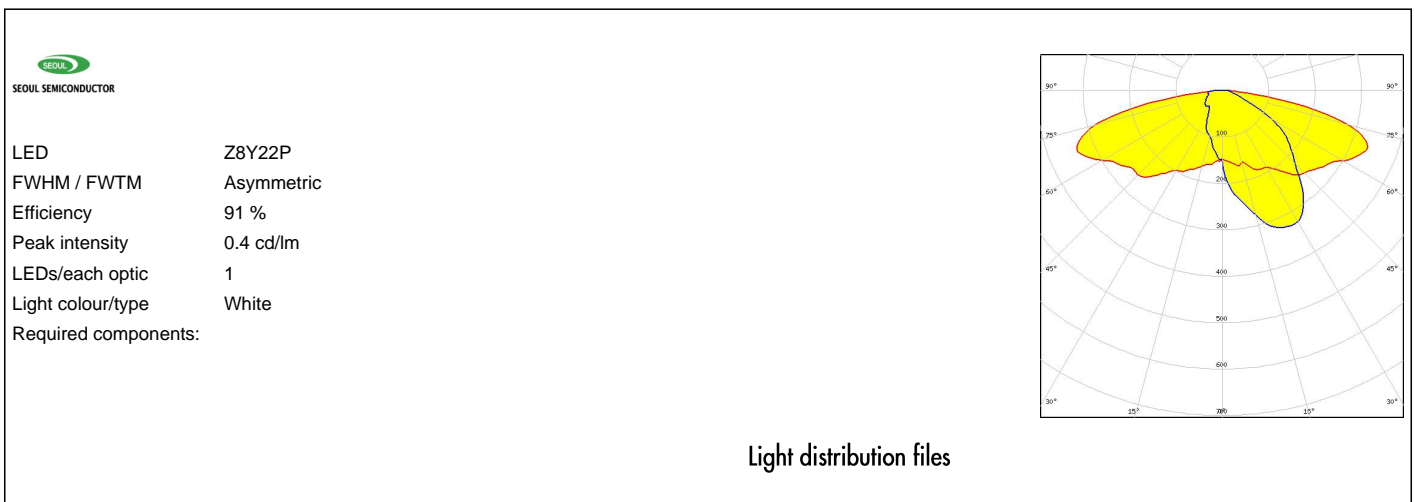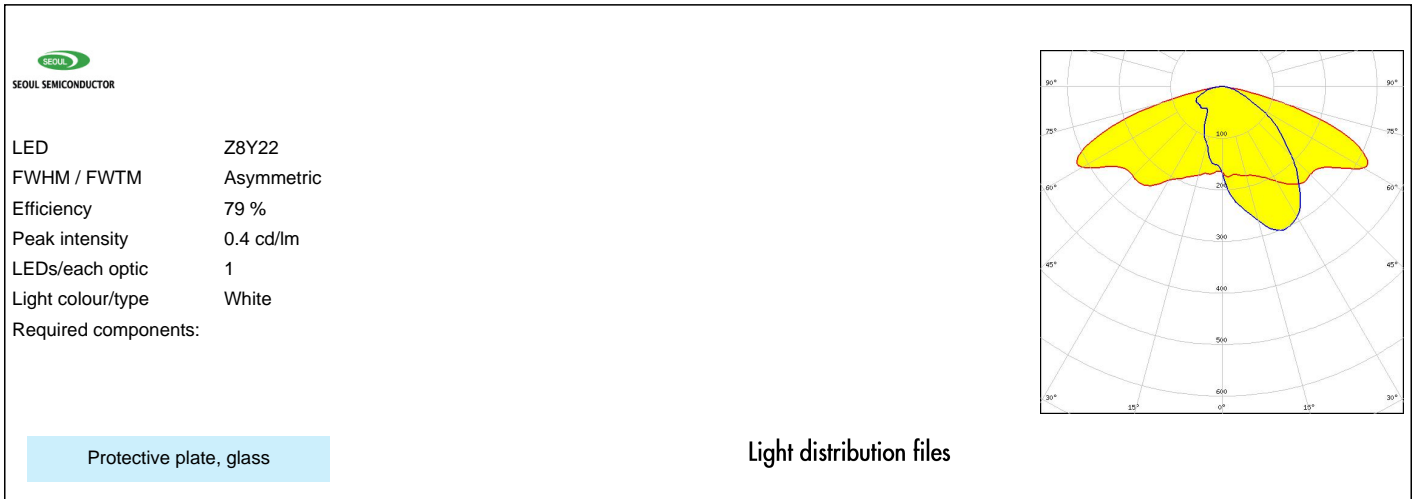

#### OPTICAL RESULTS (SIMULATED):

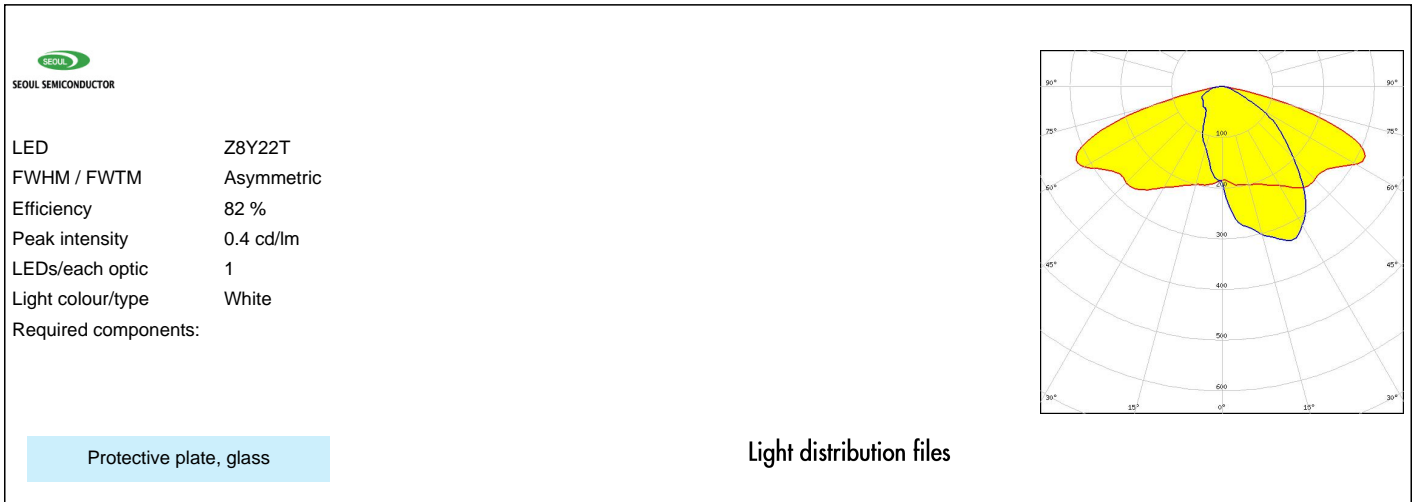

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)