



C18096\_TINA-Y-SS

L20166\_TINA-Y-SC2-HLD-WHT


Recommended PAD design



Clip reference distance after soldering

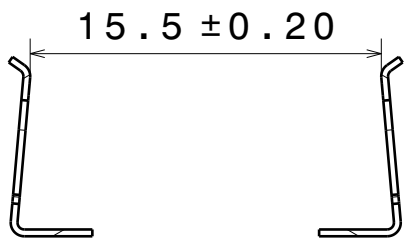

C18696\_SOLDER-CLIP-2  
Bottom of solder clip underneath holder  
Opening of solder clip facing holder

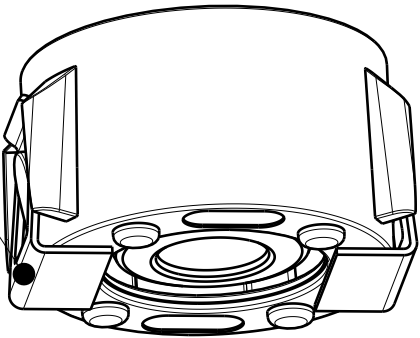

LP20177\_TINA-Y-SC2-SS-WHT

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C18096_TINA-Y-SS	LENS	1	PMMA	CLEAR
2	L20166_TINA-Y-SC2-HLD-WHT	HOLDER	1	PC	WHITE


MECHANICAL DRAWING

PRODUCT  
TINA-Y-SC2-SS

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1/1

Notes

●	PCB or heatsink level.
●	LED location
	Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
	For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>