




C16671\_OLGA-RS

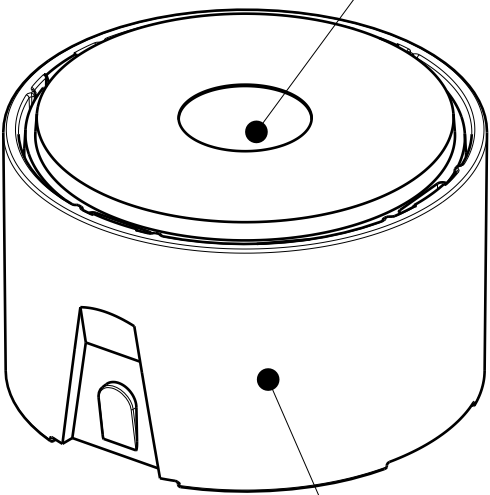


L20246\_OLGA-SC2-HLD

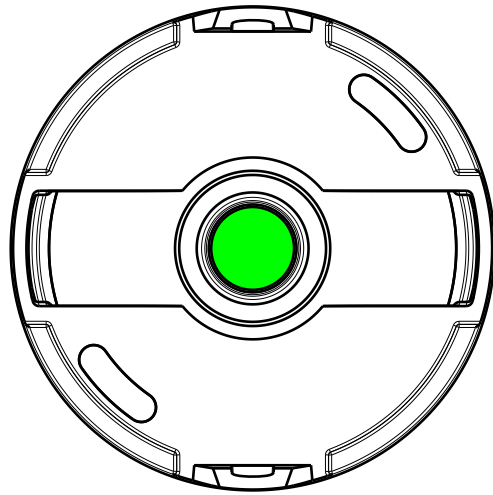


32

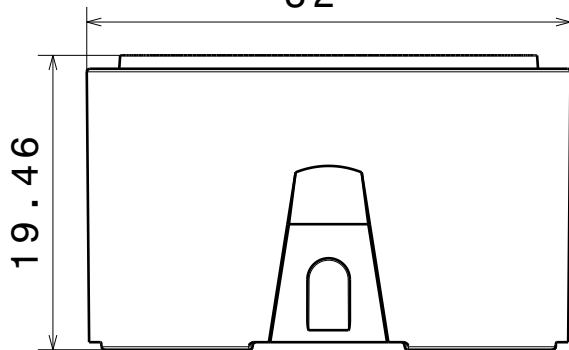


19.46

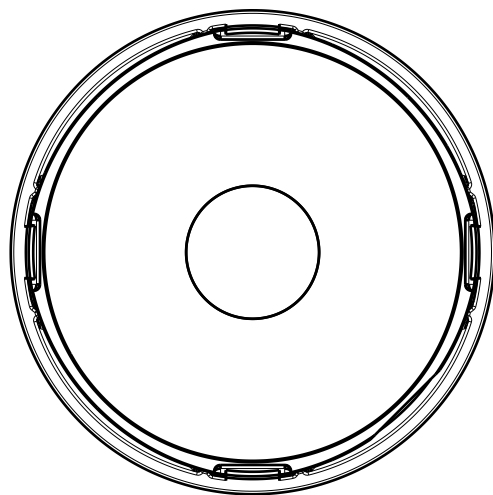


Recommended PAD design

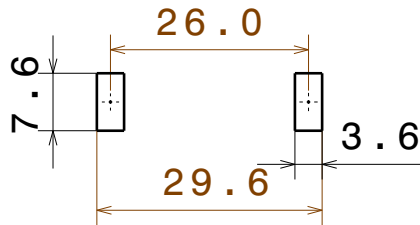

Clip reference distance after soldering

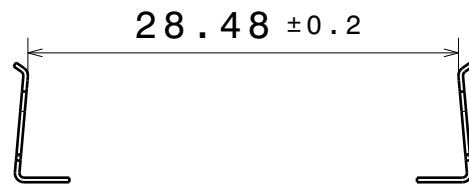

C18696\_SOLDER-CLIP-2  
Bottom of solder clip underneath holder  
Opening of solder clip facing holder

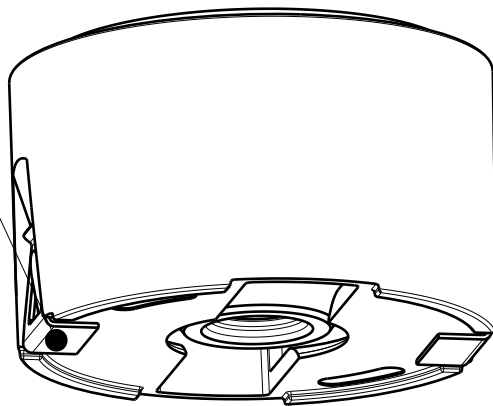

LP20247\_OLGA-SC2-RS

COMPONENTS


INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C16671_OLGA-RS	LENS	1	PMMA	CLEAR
2	L20246_OLGA-SC2-HLD	HOLDER	1	PC	BLACK

MECHANICAL DRAWING

PRODUCT  
OLGA-SC2-RS

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.  
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 2:1

WEIGHT -

A3 SHEET 1/1

Notes

PCB or heatsink level.
LED location
Ensure LED fitting from a product specific 3D model available from <a href="http://www.ledil.com">www.ledil.com</a>
For more details about installation please see LEDiL Installation Guide on <a href="http://www.ledil.com">www.ledil.com</a>